

Fall-of-Potential Ground Testing

Clamp-On Ground Testing Comparison



Fall-of-Potential Ground Testing

Clamp-On Ground Testing Comparison

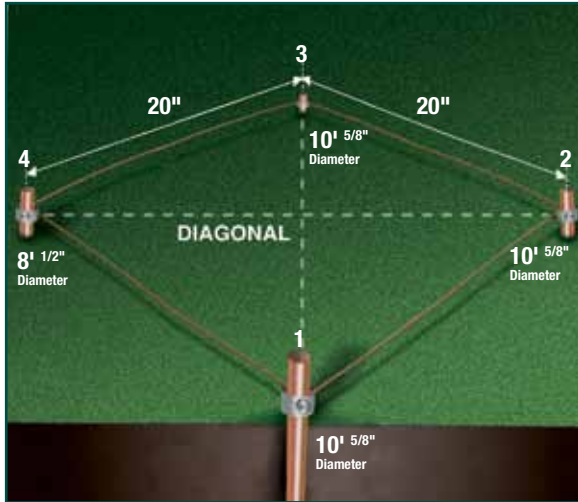


Figure 1 The Grounding System

On April 14, 2002, a ground resistance test was conducted to compare the results obtained from the Fall-of-Potential 3-Point testing method to the clamp-on testing method. The grounding system consisted of four copper clad rods installed in an approximate 20 ft square. Three of the rods are 5/8" in diameter and 10 ft in length. The fourth rod is 1/2" in diameter and 8 ft in length. All rods were coupled together with #3 AWG solid aluminum wire with brass mechanical connections. **Figure 1** shows the schematic of the system.

The tests were conducted with the following equipment manufactured by **AEMC® Instruments**:

Model 6470-B 4-Point Ground Resistance Tester

Model 4630 4-Point Ground Resistance Tester

Model 3731 Clamp-On Ground Resistance Tester

Additionally, we used the AEMC® **Model 6240**, a micro-ohmmeter to verify the bonding of the aluminum wire to the individual ground rods.

The soil conditions in the test area were predominately loam with some gravel. Conditions on the day of the test were dry and sunny, some light rain had occurred the day previous to the test. Therefore, the soil was somewhat moist at the surface.

The AEMC® **Model 6240** Micro-Ohmmeter was used to measure bonding resistance at each rod and was the first test completed. Measurements from each conductor to the rod were taken as well as measurements from conductor to conductor through the rod and clamp. Readings on rod number three ranged from 615 to 733 $\mu\Omega$ at each bonding point, indicating that all connections were good. See **Figure 2** for full results.

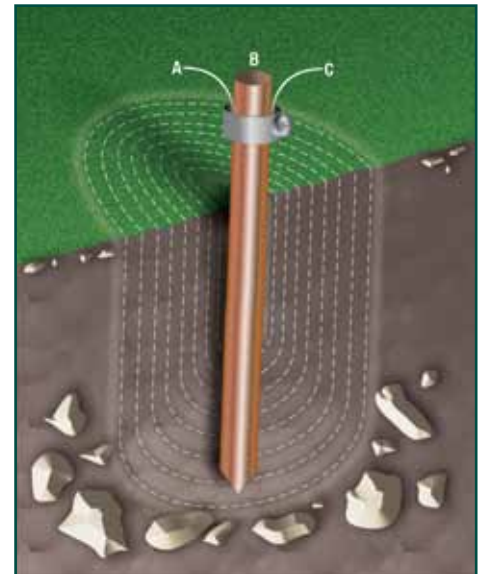


Figure 2 Bonding resistance measurements

Measurement Point	Resistance (μOhms)
A to B	713
C to B	615
A to C	733



The AEMC® **Model 6470-B** was used as 3-Point ground tester. Rod number three was first disconnected from the other rods in the system so that its individual resistance could be measured. The X lead was attached to rod number three (see **Figure 3**). The Z lead was attached to an auxiliary electrode 100 feet away and the Y lead was initially connected to the auxiliary electrode 60 feet away. Readings were taken with the Y electrode at 90, 80, 70, 60, 50, 40, 30, 20 and 10 feet. **Figure 3** shows the results of this test.


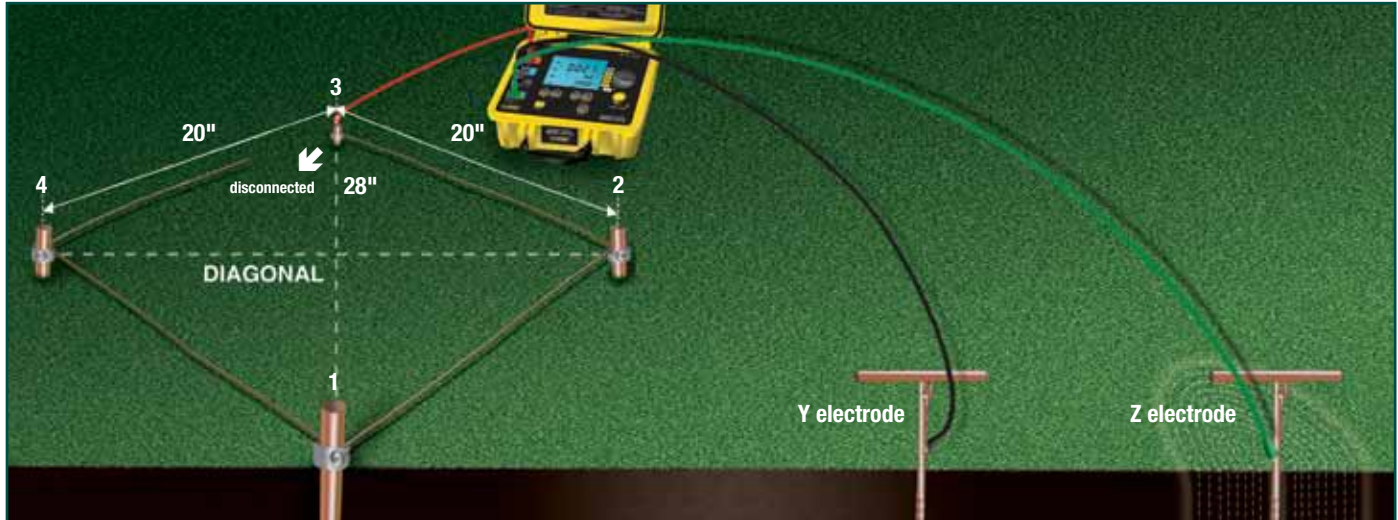


Figure 3 Three-Point test connection

Y Rod	Resistance
10%	79.4
20%	81.7
30%	83.1
40%	83.9
50%	84.3*
60%	84.8*
70%	85.6*
80%	87.3
90%	94.1

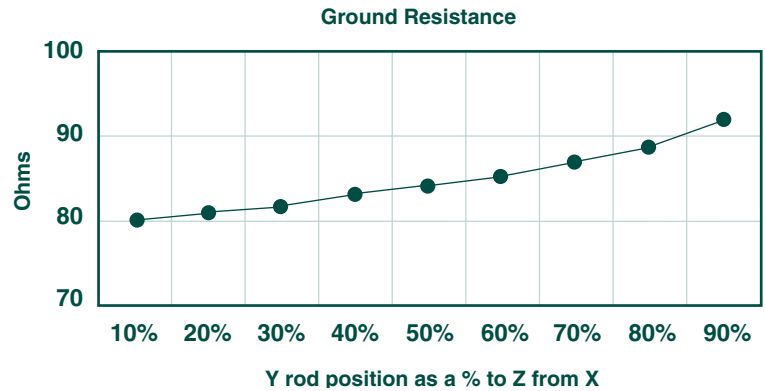


*The average of the resistances between 50% and 70% is 84.6Ω

Figure 4 Model 6470-B test results

The same test was repeated using the AEMC® **Model 4630** fall-of-potential ground tester. The results are shown in **Figure 5**.

Y Rod	Resistance
10%	71.5
20%	82.3
30%	83.2
40%	83.6
50%	83.7*
60%	84.1*
70%	84.6*
80%	85.3
90%	94.8

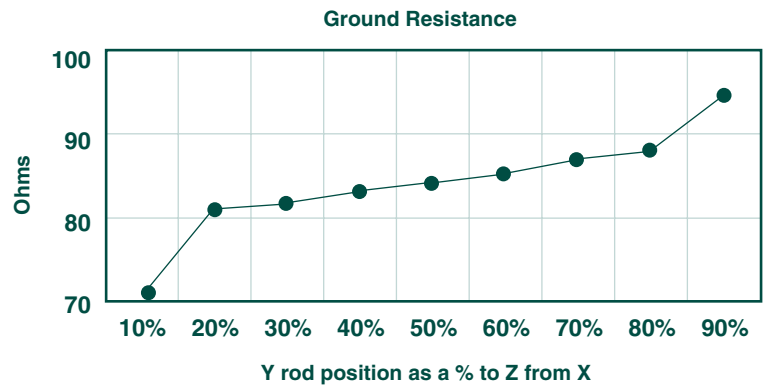

**The average of the resistances between 50% and 70% is 84.1Ω*

Figure 5 Model 4630 test results

Finally, the AEMC® **Model 3731** was used to measure the resistance at rod number three with all other rods detached from it. A temporary cable was installed between rod number three and the municipal grounding system thus setting up the required parallel paths necessary for accurate measurement using a clamp-on ground tester (see **Figure 6**). Under these conditions, the reading was 84.5Ω.

The results of these tests showed that the clamp-on ground tester is indeed an effective tool in measuring ground resistance when used under the proper conditions. Readings between the clamp-on ground testing and the fall-of-potential ground testing method correlate. The advantages of using the clamp-on tester were the ability to test without disconnecting the rod from service and the ability to test without the need for auxiliary ground electrodes. These two points saved considerable amount of time in conducting the test.

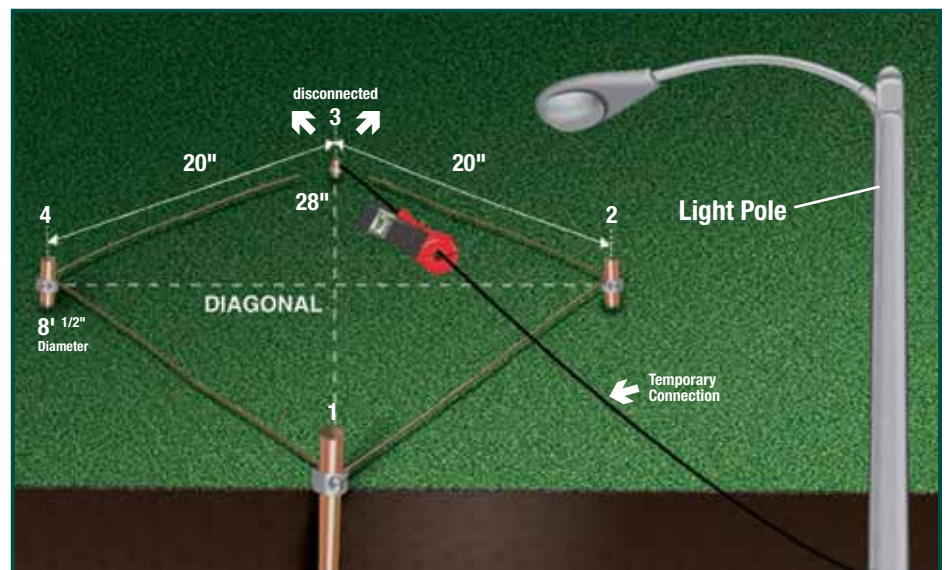


Figure 6 Single rod test using the Model 3731 clamp-on ground resistance tester

Result Comparison

Model 6470-B	84.6Ω	} Fall-of-Potential
Model 4630	84.1Ω	
Model 3731	84.5Ω	Clamp-On

We have a solution! Contact us with any technical or product application questions...



United States & Canada

**Chauvin Arnoux®, Inc.
d.b.a. AEMC® Instruments**
200 Foxborough Blvd.
Foxborough, MA 02035 USA
(508) 698-2115 • Fax (508) 698-2118

Customer Support
for placing an order,
obtaining price & delivery
customerservice@aemc.com

Sales & Marketing Department
for general sales and marketing
information
sales@aemc.com
marketing@aemc.com

Repair & Calibration Service
for information on repair & calibration,
obtaining a user manual
repair@aemc.com

United States & Canada (continued)

**Technical & Product
Application Support**
for technical and application support
techinfo@aemc.com

Webmaster
for information regarding
www.aemc.com
webmaster@aemc.com

South America, Central America, Mexico & the Caribbean

**Chauvin Arnoux®, Inc.
d.b.a. AEMC® Instruments**
15 Faraday Drive
Dover, NH 03820 USA
export@aemc.com

Australia & New Zealand

**Chauvin Arnoux®, Inc.
d.b.a. AEMC® Instruments**
15 Faraday Drive
Dover, NH 03820 USA
international@aemc.com

All other countries

Chauvin Arnoux® SCA
190, rue Championnet
75876 Paris Cedex 18, France
Tel 33 1 44 85 45 28
Fax 33 1 46 27 73 89
info@chauvin-arnoux.com
www.chauvin-arnoux.com



AEMC ONE SOURCE®
For All Your Electrical Test & Measurement Instruments

Call the AEMC® Instruments Technical Assistance Hotline for immediate consultation with an applications engineer: **(800) 343-1391**
Chauvin Arnoux®, Inc. d.b.a. AEMC® Instruments • 200 Foxborough Blvd. • Foxborough, MA 02035 USA • (800) 343-1391 • (508) 698-2115 • Fax (508) 698-2118
Export Department: (978) 526-7667 • Fax (978) 526-7605 • E-mail: export@aemc.com

APP_Ground_ComparisonofTesters_0711Rev03 Printed in the USA