

AC Current Probe Model MN113

User Manual

DESCRIPTION

The MN113 (Catalog #2114.99) is a high accuracy voltage output current probe for tight areas such as crowded wiring. Extends DMM AC measurements to 10A_{ac}. The Model MN113 offers a 4mm banana jack.

WARNING

These safety warnings are provided to ensure the safety of personnel and proper operation of the instrument.

- Read the instruction manual completely and follow all the safety information before attempting to use or service this instrument.
- Use caution on any circuit: Potentially high voltages and currents may be present and may pose a shock hazard.
- Read the Safety Specifications section prior to using the current probe. Never exceed the maximum voltage ratings given.
- Safety is the responsibility of the operator.
- ALWAYS connect the current probe to the display device before clamping the probe onto the sample being tested.
- ALWAYS inspect the instrument, probe, probe cable, and output terminals prior to use. Replace any defective parts immediately.
- NEVER use the current probe on electrical conductors rated above 600V in overvoltage. Use extreme caution when clamping around bare conductors or bus bars.

INTERNATIONAL ELECTRICAL SYMBOLS



This symbol signifies that the current probe is protected by double or reinforced insulation. Use only specified replacement parts when servicing the instrument.



This symbol signifies CAUTION! and requests that the user refer to the user manual before using the instrument.

RECEIVING YOUR SHIPMENT


Upon receiving your shipment, make sure that the contents are consistent with the packing list. Notify your distributor of any missing items. If the equipment appears to be damaged, file a claim immediately with the carrier and notify your distributor at once, giving a detailed description of any damage.

PACKAGING

The AC Current Probe MN113 is shipped with this instruction manual and a product warranty and registration card.

INSTRUMENT COMPATIBILITY

The Model MN113 is compatible with any voltmeter, multimeter, or other voltage measuring instruments with an input impedance greater than 100 K Ω . To achieve the stated accuracy, use the MN113 with an voltmeter having an accuracy of 0.75% or better.

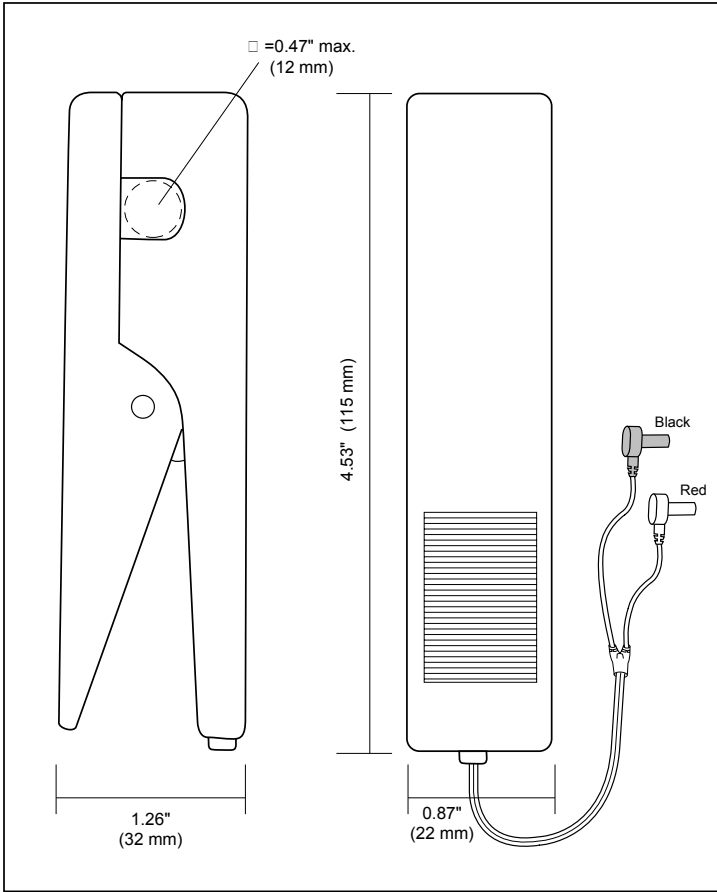

ELECTRICAL SPECIFICATIONS

Current Range:

1 mA to 10 A AC
Continuous duty cycle

Output Signal:

100 mV AC / A AC
(1 V @ 10 A)

Accuracy and Phase Shift*:

Accuracy:

1 mA to 10 A : 3% ± 0.15 mA
40 Hz to 3 KHz: 3.5% ± 2 mA

Phase shift:

100 mA to 10 A ≤ 8 °

(*Reference conditions: 23°C ±3°K, 20 to 85% RH, 48 to 65 Hz, external magnetic field <40 A/m, no DC component, no external current carrying conductor, test sample centered.) Load impedance = 1MΩ

Frequency Range:

30 to 5 KHz

Load Impedance:

100 KΩ min.

Working Voltage:

600 V AC

Common Mode Voltage:

30 V AC

MECHANICAL SPECIFICATIONS

Operating Temperature:

- 13° to 122°F (- 25° to 50°C)

Storage Temperature:

- 40° to 176°F (- 40° to 80°C)

Influence of Temperature:

< 0.2% per 10°K

Maximum Conductor Size:

0.47" Ø max. (12 mm)

Dimensions:

1.26 x 4.5 x 0.87"
(32 x 115 x 22 mm)

Weight:

6 oz (160 g)

Colors:

Light gray handles with red cover

Output:

2 standard 4 mm banana jack
with S1 mark with a red dot on
the top of the terminal.

Polycarbonate Material:

Handles: 10% Fiberglass charge
polycarbonate UL 94 V0

SAFETY SPECIFICATIONS

Electrical:

- 30 V max common mode between output and ground
- 3 kV 50/60 Hz dielectric for 1 mn between core and output cable

ORDERING INFORMATION

AC Current Probe

Model MN113 **Cat # 2114.99**

Accessories:

Pair, Current Leads

(39" color-coded) **Cat # 100.361**

Pair, Safety Current Leads

(5ft retractable, 250V)... **Cat # 100.319**

OPERATION

Making Measurements with the AC Current Probe Model MN113

- Connect the terminals to the 2 V range of your DMM or instrument. The MN113 has a ratio of 10:1. This means that for 10 A AC in the conductor around which the probe is clamped, 1 V AC will come out of the probe leads to your DMM or instrument. The output is 100 mV AC per Amp AC. Select the range on your DMM or instrument which best corresponds to the measured current. If the magnitude is unknown, start with the highest range (2 V AC) then work down until the appropriate range and resolution is reached. Clamp the probe around the conductor. Take the reading on the meter and multiply it by 10 to obtain the measured current. (e.g., 59 mV reading: $59 \times 10 = 590$ mA or 0.59 A).

Meter Reading	10 mV	120 mV	1200 mV
Measured Value	100 mA = 0.1 A	1200 mA = 1.2 A	12000 mA = 12.0 A

- For best accuracy, avoid if possible, the proximity of other conductors which may create noise.

Tips for Making Precise Measurements

- When using a current probe with a meter, it is important to select the range that provides the best resolution. Failure to do this may result in measurement errors.
- Make sure that probe jaw mating surfaces are free of dust and contamination. Contaminants cause air gaps between the jaws, increasing the phase shift between primary and secondary. It is very critical for power measurement.

MAINTENANCE:

Warning

- For maintenance use only original factory replacement parts.
- To avoid electrical shock, do not attempt to perform any servicing unless you are qualified to do so.
- To avoid electrical shock and/or damage to the instrument, do not get water or other foreign agents into the probe

Cleaning

To ensure optimum performance, it is important to keep the probe jaw mating surfaces clean at all times. Failure to do so may result in error in readings. To clean the probe jaws, use very fine sand paper (fine 600) to avoid scratching the jaw, then gently clean with a soft oiled cloth.

REPAIR AND CALIBRATION

You must contact our Service Center for a Customer Service Authorization number (CSA#). This will ensure that when your instrument arrives, it will be tracked and processed promptly. Please write the CSA# on the outside of the shipping container. If the instrument is returned for calibration, we need to know if you want a standard calibration, or a calibration traceable to N.I.S.T. (includes calibration certificate plus recorded calibration data).

Chauvin Arnoux[®], Inc. d.b.a. AEMC[®] Instruments
15 Faraday Drive • Dover, NH 03820 USA
Tel: (800) 945-2362 (Ext. 360)
(603) 749-6434 (Ext. 360)
Fax: (603) 742-2346 or (603) 749-6309
repair@aemc.com

(Or contact your authorized distributor)

Costs for repair, standard calibration, and calibration traceable to N.I.S.T. are available.

NOTE: All customers must obtain a CSA# before returning any instrument.

TECHNICAL AND SALES ASSISTANCE

If you are experiencing any technical problems, or require any assistance with the proper use or application of this instrument, please call our technical hotline:

(800) 343-1391 • (508) 698-2115 • Fax (508) 698-2118
Chauvin Arnoux[®], Inc. d.b.a. AEMC[®] Instruments
techsupport@aemc.com
www.aemc.com