

# Thermal Imaging

## Models 1950 & 1954



- Operational in less than 10 seconds
- Focus-free capability
- Exceptionally long battery life
- Wirelessly integrate data from other measuring instruments
- Practical: voice recordings, customizable integrated emissivity table, organize folders by site

Our products are backed by over 125 years of experience in test and measurement equipment, and encompass the latest international standards for quality and safety.

(800) 343-1391  
[www.aemc.com](http://www.aemc.com)

 **AEMC**<sup>®</sup>  
INSTRUMENTS  
CHAUVIN ARNOUX GROUP

# THERMAL IMAGING IR CAMERAS

Designed for use in the electrical maintenance and mechanical maintenance sectors

## FEATURES

- **Focus free quality.**  
Provides crisp, clear thermal and real images without the need for adjustments.
- **Accurate temperate measurement over the full range.**  
From -4 to 482°F (-20 to 250°C) with a stability of 80mK at 86°F (30°C).
- **Audio narration can be recorded with thermograms.**  
You can describe the circumstances of each image, providing additional text and description to be stored with each image.
- **Automatic non-uniformity temperature correction.**  
Compensates for any internal drift to improve accuracy.
- **Measurement data can also be stored with each thermogram**  
Both cameras can wirelessly connect via Bluetooth to compatible AEMC® test instruments and loggers, enabling you to combine electrical and physical measurements to the imaging data.
- **Offers broad range of operational capabilities.**  
Locating the cold and hot spots in the image, measuring the temperature of a selected point in the image, displaying the temperature profile of a line in the image, displaying points at the same temperature in the image, and freezing the colors representing the temperatures.
- **CAMReport® software.**  
Included for downloading stored files from the instrument to a computer for further processing, analysis, and report generation.
- **This camera is built to last.**  
Their rugged design survives if accidentally dropped on any of its surfaces from as high as 6'.
- **Exceptionally long battery life up to 13 hours (model dependent).**  
Ensures no loss of test time during a typical work day.



### MODEL 1954

Thermo Resolution  
120 x 160

Model 1954 Feature  
Laser Pointer



### MODEL 1950

Thermo Resolution  
80 x 80



## ACCESSORIES/REPLACEMENT PARTS

2121.60 - Carrying Case with Foam Insert

2126.49 - Cable - USB (Type A to 5-pin Mini-B)

## PRODUCTS INCLUDE

Rugged carrying case, 4 NiMH rechargeable batteries and charger, Bluetooth headset, USB cable, User Manual, Micro SD HC card and CAMReport® software.



# CAMERA CONSTRUCTION

Performs infrared thermography,  
an indispensable means for ensuring safety

**Left Side of Camera:**

- PROTECTIVE ELASTOMER FLAP
- MINI USB CONNECTOR
- MICRO SD SLOT

MULTIPLE-FUNCTION KEYS  
ASSOCIATED WITH THE DISPLAY

NAVIGATION KEYS

AUTOMATIC  
BRIGHTNESS  
SENSOR

ON/OFF KEY

PROTECTIVE LENS COVER  
*Protects against scratches*

LASER POINTER  
THERMAL LENS  
VISIBLE CAMERA LENS

*Model 1954  
includes laser*

CONFIGURABLE TRIGGER  
*Offers exceptional ergonomics*


*Balance guaranteed:  
the camera stands on its own!*



# DISPLAY & MENU CONTENTS


Programmable cursors provide a comprehensive set of options for evaluating thermal profiles

## SELECTABLE CURSOR TOOLS

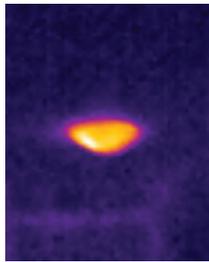


### NONE

No cursor display, temperature evaluation is determined by color palette only.

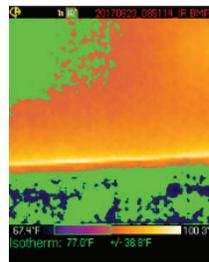


### ISOTHERM

Displays points that fall in the same temperature range in the same color. User picks green, red or brown as the display color and defines the range and tolerance.

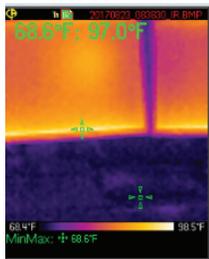


### MIN/MAX

Automatically displays the cold and hot spot values at the Min and Max cursor positions.

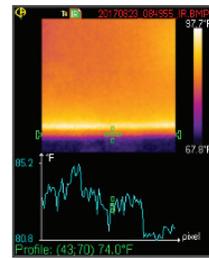


### PROFILE

Displays the temperature profile of a line defined by the cursor. Cursor can be moved along the line to get an individual temperature.

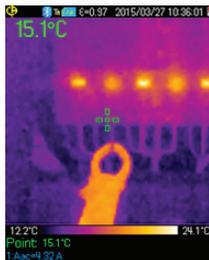

### POINT

Displays the value at the cursor. Cursor is movable using the navigation keys.

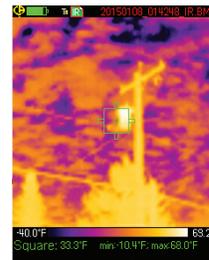

### SQUARE

Displays the Min/Max and mean values within the box. Box size and location is user adjustable.


## EASY ACCESS MENUS



MAIN MENU DISPLAY



DIRECTORY MENU

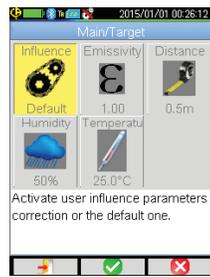

MAIN TARGET MENU



VOCAL RECORD MENU

Comprehensive software offering all the necessary functions for effective analysis of measurement results and report generation

Operator : John Doe	Location : Foxborough, MA	Equipment: CA 1950	Date : 9/13/2017 9:14:12 AM
------------------------	------------------------------	-----------------------	--------------------------------

<b>Infrared image</b>	<b>Digital image</b>	<b>Merged image</b>
-----------------------	----------------------	---------------------

<b>Image properties</b>	
Image name	20170913_091412_IR.BMP
Emissivity:	0.88
Humidity	55.0 %
Environment temperature	74.00 °F
Distance	1.75 ft

<b>Temperature measurement</b>		
RO	Min:69.70 °F	Max:154.81 °F
	Emissivity:0.88	Env. T°:74.00 °F

Create reports using one of three available templates. Export reports to Word or PDF format making them easy to print and/or archive

Target selection	Color range	Open	Avg. temp.	Min. temp.	Emissivity	Humidity	Env. temp.	Distance
20170913_091412_IR.BMP	3952	113	86.87 °F	32.03 °F	0.88	55.5%	73.00 °F	1.87 ft

Typical analysis tab screen

## FEATURES

- Transfer measurements from camera to software via USB cable, wireless Bluetooth, or removable SD card
- Drag-and-drop measurement images right from the storage directory to the analysis window
- Includes thermal and real images automatically
- Superimpose thermal images over real images for better visual analytical results
- Locate Min/Max and mean temperatures of the image or an area of the image
- User selectable color palette from seven different types
- Summary table automatically displays environmental parameters and statistical results of the measurements
- Include dictated audio comments in the report
- Includes multiple analytical tools for assessing thermal images
- Manually enter measurement analysis findings, site characteristics and operator information to your report
- Add graphics such as logos to your reports
- Correct measurement results using built-in or user configured emissivity tables
- Include multiple measurements in any report
- Save reports as a Word or PDF document

CATALOG NO.	DESCRIPTION
2121.40	Thermal Imaging IR Camera Model 1950 (Resolution 80 x 80)
2121.41	Thermal Imaging IR Camera Model 1954 (Resolution 120 x 160)

# BLUETOOTH CAPABILITY

Wirelessly connects via Bluetooth to compatible clamp-on meters, multimeters and environmental loggers combining electrical and physical measurements to imaging data for a complete analysis capability

In addition to capturing both real and thermal images, these cameras are capable of Bluetooth communication with a variety of instruments to give you the full measurement picture.


## MODEL 407, MODEL 607, MTX3293

The Model 1950 and 1954 can receive data from the Models 407 and 607 power clamp meters and the MTX3293 multimeter providing the ability to store electrical real time measurements with the thermogram.

## ENVIRONMENTAL DATA LOGGERS

The Model 1954 also communicates with AEMC's environmental data loggers to include the ability to add humidity, dew point, wind speed and flow, as well as light measurements to thermograms.

	1950	1954
<b>INSTRUMENT COMPATIBILITY</b>		
407 Power Clamp meter	✓	✓
607 Power Clamp meter	✓	✓
MTX3293-BT Multimeter	✓	✓
1110 Lightmeter Data Logger		✓
1227 Thermo-Anemometer Data Logger		✓
1246 Thermo-Hygrometer Data Logger		✓
1821 Thermocouple Thermometer Data Logger		✓
1822 Thermocouple Thermometer Data Logger		✓
1823 RTD Thermometer Data Logger		✓

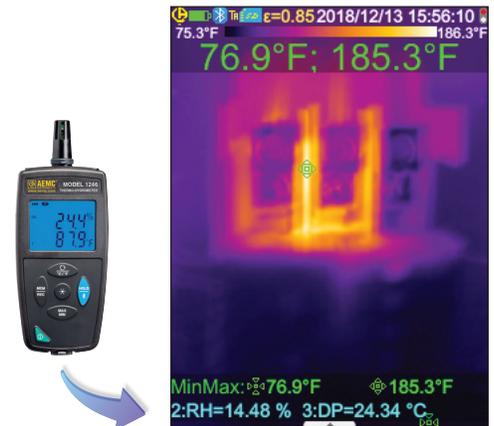

Thermogram and connectivity to the Thermo-Hygrometer Model 1246



## COMPATIBLE INSTRUMENTS

(Shown, from left:)

- 2139.51 - Power Clamp-on Meter Model 407
- 2139.61 - Power Clamp-on Meter Model 607
- 2154.06 - MTX3293-BT Multimeter
- 2121.71 - Environmental Data Logger Model 1110
- 2121.72 - Environmental Data Logger Model 1227
- 2121.73 - Environmental Data Logger Model 1246
- 2121.74 - Environmental Data Logger Model 1821
- 2121.75 - Environmental Data Logger Model 1822
- 2121.76 - Environmental Data Logger Model 1823

# www.aemc.com

## United States & Canada

**Chauvin Arnoux®, Inc.**  
**d.b.a. AEMC® Instruments**  
15 Faraday Drive  
Dover, NH 03820 USA  
(603) 749-6434 • Fax (603) 742-2346

## Customer Support

Place orders, obtain pricing and delivery  
(800) 343-1391 (Ext. 361)  
Fax (603) 749-9153  
customerservice@aemc.com

## Sales & Marketing Department

sales@aemc.com  
marketing@aemc.com

## Repair & Calibration Service

(800) 343-1391 (Ext. 360)  
repair@aemc.com

## United States & Canada (continued)

**Technical & Product  
Application Support**  
(800) 343-1391 (Ext. 351)  
techinfo@aemc.com

## South America, Central America, Mexico & the Caribbean

Chauvin Arnoux®, Inc.  
d.b.a. AEMC® Instruments  
15 Faraday Drive  
Dover, NH 03820 USA  
+1 (603) 749-6434 (Ext. 520)  
export@aemc.com

## Australia & New Zealand

Chauvin Arnoux®, Inc.  
d.b.a. AEMC® Instruments  
15 Faraday Drive  
Dover, NH 03820 USA  
+1 (603) 749-6434 (Ext. 520)  
export@aemc.com

## All Other Countries

**Chauvin Arnoux® SCA**  
12, rue Sarah Bernhardt  
92600 Asnières-sur-Seine – France  
Tel +33 1 44 85 44 85  
Fax +33 1 46 27 73 89  
info@chauvin-arnoux.com  
www.chauvin-arnoux.com

**Over 125 Years  
Developing  
Test and  
Measurement  
Instruments**

**VOLUME 21**

- Cable Testers
- Clamp-On Meters
- Current Measurement Probes
- Data Loggers
- Digital Multimeters
- Electrical Test Tools
- Environmental Testers
- Ground Resistance Testers
- Leakage Current Meters & Probes
- Megohmmeters
- Micro-Oscilloscopes
- Power Quality Analyzers, Meters & Loggers
- Test and Measurement (Lab) Instruments
- Thermal Imaging Cameras
- Transformer Ratimeters

**AEMC  
INSTRUMENTS**  
CHAUVIN ARNOUX GROUP

WWW.AEMC.COM  
TECHNICAL HOTLINE: (800) 343-1391

**GROUND RESISTANCE TESTERS**  
For all of your Ground Integrity® Testing needs...

Whether you are using a simplified 2 Point, 3 point, or a more complex 4 point Fall of Potential test, it's not necessary to use a touch sensitive test device in the field. Our Ground Resistance Tester will save you both time and money.

Whatever AEMC® ground tester you choose, you can count on it to be the highest quality, the most complete package and the easiest to learn to use.

Our products are backed by over 125 years of experience in test and measurement equipment, and encompass the latest international standards for quality and safety.

Technical Hotline: (800) 343-1391  
www.aemc.com

**AEMC  
INSTRUMENTS**

**POWER QUALITY**  
For all of your Power Quality needs...

A Family of Power Quality Analyzers, Loggers & Meters for Clean Power

Our products are backed by over 100 years of experience in test and measurement equipment, and encompass the latest international standards for quality and safety.

Technical Hotline: (800) 343-1391  
www.aemc.com

**AEMC  
INSTRUMENTS**

**MEG OHMMETERS**  
For all of your Insulation Testing needs...

The Legacy of Megohmmeters

AEMC offers a full line of megohmmeters with test ranges from 50V to 500V, model equipment, capable of measuring insulation resistance from 1000Ω to 200TΩ. Test ranges, measurement ranges, accuracy, reliability and built-in features make AEMC megohmmeters the most complete and have some of the most advanced features.

Our products are backed by over 100 years of experience in test and measurement equipment, and encompass the latest international standards for quality and safety.

Technical Hotline: (800) 343-1391  
www.aemc.com

**AEMC  
INSTRUMENTS**

# FAMILY of PRODUCTS

Visit our website at [www.aemc.com](http://www.aemc.com)

**AEMC ONE SOURCE®**  
For Your Electrical/Power Test & Measurement Instruments

Call the AEMC® Instruments Technical Assistance Hotline for immediate consultation with an applications engineer: (800) 343-1391 x351

Chauvin Arnoux®, Inc. d.b.a. AEMC® Instruments • 15 Faraday Drive • Dover, NH 03820 USA • (800) 343-1391 • (508) 698-2115 • Fax (508) 698-2118  
Email: sales@aemc.com | Export Department: +1 (603) 749-6434 x520 • Fax +1 (603) 740-7550 • E-mail: export@aemc.com