


RELAYS

RELAYS

RELAYS

RELAYS

RELAYS

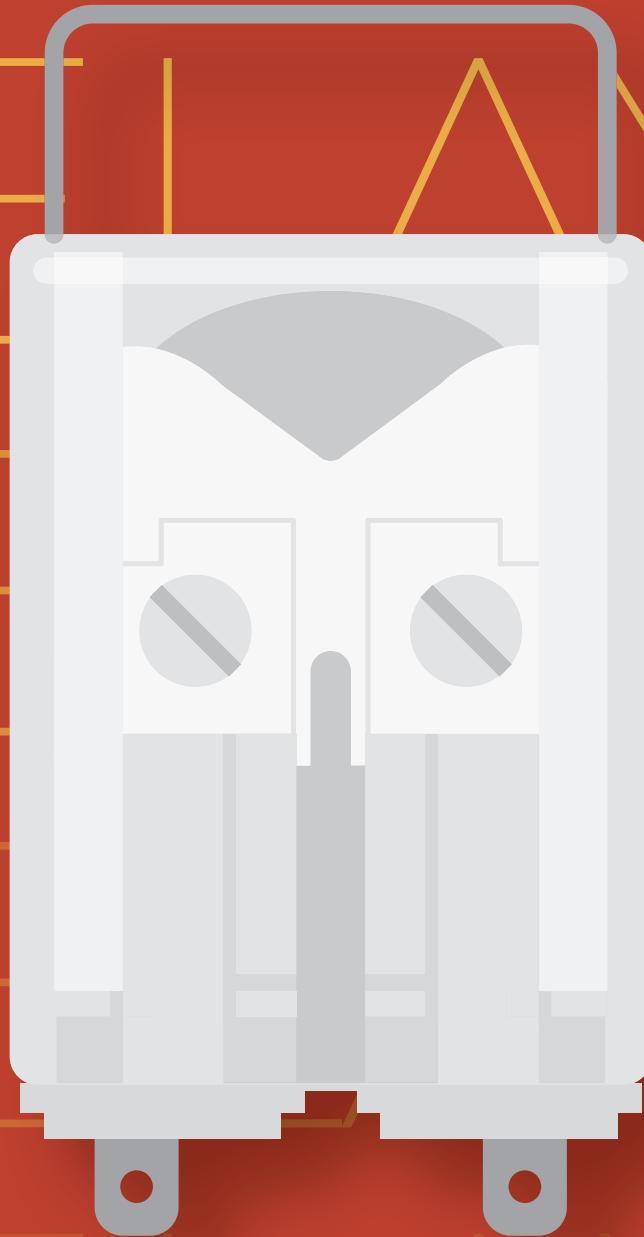

INSTANTANEOUS MONOSTABLE RELAYS

INSTANTANEOUS
MONOSTABLE

INSTANTANEOUS
MONOSTABLE WITH
FORCIBLY GUIDED CONTACTS

TIME DELAY
(ON PICK-UP
OR DROP-OUT)

EXPLANATION OF
SOCKET NUMBERING


FRONT
CONNECTION

BACK
CONNECTION

PCB MOUNT

RETAINING CLIPS

KEYING PINS



RELAYS

INSTANTANEOUS MONOSTABLE RELAY 2-4-6-8-12 CONTACTS

POK SERIES

USER SECTORS



Power generation



Nuclear



Power transmission



Rolling stock



Fixed railway installations



Shipbuilding



Petroleum industry




Heavy industry




POK



BIPOK



TRIPOK



QUADRIPOK

PRODUCT ADVANTAGES

- Compact plug-in monostable instantaneous relays
- Solid and rugged construction for heavy or intensive duty
- Long life expectancy
- Independent and self-cleaning contacts
- Separate arc breaking chambers
- Magnetic arc blow-out standard
- Excellent shock and vibration resistance
- Option for use in geothermal sites available
- Also available in current-monitoring version
- Also available in PCB-mount version
- Wide variety of configurations and customizations
- Wide range of sockets
- Retaining clip for secure locking of relay on socket
- Transparent cover, pull-out handle
- Positive mechanical keying for relay and socket

DESCRIPTION

The POK series is made up of five basic models, created from a single module with two contacts that can be used in multiple combinations to provide solutions with **2 - 4 - 6 - 8 and 12 change-over contacts**.

The construction of the relays and careful choice of the materials are such that they ensure long life and considerable ruggedness even in harsh operating environments and in the presence of strong temperature fluctuations.

A specific treatment (P5GE0 or P6GE0) combining coil tropicalization with gold-plated contacts allows the use of these items in geothermal electric power stations, as relays for signaling functions, for controlling intermediate devices and for all non-power circuits.

Excellent electrical and mechanical performance levels allow the product to be used in the most demanding of sectors such as, for example, control and signaling functions in electricity generating stations, electrical transformer stations, rail transport or in industries with continuous production processes (chemical industry, petroleum industry, rolling mills, cement factories, etc.).

Above all, the excellent ability to withstand shock and vibration allow their use on rolling stock.

Safe and reliable operation is guaranteed by:

- **Contact terminals without connecting braids and soldered joints.** The terminals connecting with the socket are provided by a direct extension of the contacts.
- Mechanism without return springs.
- Adoption of all-metallic operating mechanism, unaffected by the thermal aging that typically degrades organic materials, such as plastics.
- Excellent shock and vibration resistance.
- Notable resistance to high operating temperatures and high thermal shocks.

The self-cleaning contacts are independent, being anchored neither one to another nor to a common operating mechanism. Positioned in separate chambers, they enable better breaking of the arc.

In addition, they are equipped with magnetic arc blowout, guaranteeing a particularly efficient break of direct current loads. The common contact is mounted to a separate return device, consisting in a flexible blade designed to ensure uniformity of the pressures on break contacts. Given their dimensions and specifications, POK relays provide the logical complement to power relays of the OK series.

Models	Number of contacts	Nominal current	Rolling stock application
POK	2	5 A	•
POKS	2	10 A	•
BIPOK	4	5 A	•
BIPOKS	4	10 A	•
TRIPOK	6	5 A	•
TRIPOKS	6	10 A	•
QUADRIPOKS	8	10 A	•
ESAPOKS	12	10 A	

FOR CONFIGURATION OF PRODUCT CODE, SEE "ORDERING SCHEME" TABLE

Coil specifications	POK - POKS	BIPOK - BIPOKS	TRIPOK - TRIPOKS	QUADRIPOKS	ESAPOKS
Nominal voltages U_n ⁽¹⁾	DC: 12-24-36-48-72-96-110-125-132-144-220 AC: 12-24-48-110-127-220-230				
Maximum consumption at U_n (DC/AC)	2.5 W / 3.5 VA	3 W / 4 VA	3.5 W / 5.5 VA	6 W / 8 VA	7 W / 11 VA
Operating range	Standard ⁽¹⁾ DC: 80...115 % U_n AC: 85...110 % U_n Rolling stock version ^{(2) (3)} DC: 70...125 % U_n				
Type of duty	Continuous				
Drop-out voltage ⁽⁴⁾	DC: > 5 % U_n AC: > 15 % U_n				

⁽¹⁾ Other values on request. For ESAPOKS, values > 24 V.

⁽²⁾ See "Ordering scheme" table for order code.

⁽³⁾ For operating ranges different to that specified by EN 60077, refer to table "Railways, rolling stock - Special operating ranges".

⁽⁴⁾ Limit value for supply voltage, expressed as % of the nominal value, beneath which the relay is certainly de-energized.

Contact specifications	POK - POKS	BIPOK - BIPOKS	TRIPOK - TRIPOKS	QUADRIPOKS	ESAPOKS	
Number and type	2 CO, form C	4 CO, form C	6 CO, form C	8 CO, form C	12 CO, form C	
Current	POK - BIPOK - TRIPOK		POKS - BIPOKS - TRIPOKS - QUADRIPOKS - ESAPOKS			
	Nominal ⁽¹⁾		5 A			
	Maximum peak (1 min) ⁽²⁾		10 A			
Maximum pulse (10 ms) ⁽²⁾		100 A				
Example of electrical life expectancy ⁽³⁾	0.2 A – 110 V _{DC} – L/R 40 ms: 10 ⁵ operations		0.5 A – 110 V _{DC} – L/R 40 ms: 10 ⁵ operations			
	1800 operations / hour 0.7 A – 110 V _{DC} – L/R 0 ms: 10 ⁵ operations		1 A – 110 V _{DC} – L/R 0 ms: 10 ⁵ operations			
Minimum load	Standard contacts					
	Gold-plated contact P4GEO ⁽⁴⁾					
	Gold-plated contact P8 ⁽⁴⁾					
Maximum breaking voltage	250 V _{DC} / 350 V _{AC}					
Contact material	AgCu		Ag / AgCu			
Operating time at U_n (ms) ^{(5) (6)}	DC - AC					
	Pick-up (NO contact closing)	≤ 20 - ≤ 20	≤ 25 - ≤ 25	≤ 25 - ≤ 25	≤ 25 - ≤ 25	≤ 25 - ≤ 25
	Drop-out (NC contact closing)	≤ 15 - ≤ 20	≤ 20 - ≤ 40	≤ 20 - ≤ 45	≤ 20 - ≤ 40	≤ 20 - ≤ 45

⁽¹⁾ On all contacts simultaneously, reduction of 30 %.

⁽²⁾ The maximum peak and pulse currents are those currents that can be handled, for a specified time, by the contact. They do not refer to steady or interrupted currents.

⁽³⁾ For other values, see electrical life expectancy curves.

⁽⁴⁾ Specifications of contacts on new relay

a. Plating material: **P4GEO**: gold-nickel alloy (> 6 μ) **P8**: gold-cobalt alloy (> 5 μ), knurled contact

b. When the gold-plated contact is subject to heavy loads, it will be degraded on the surface. In this case, the specifications of the standard contact should be taken into consideration. This does not impair relay operation.

⁽⁵⁾ Unless specified otherwise, the operating time signifies until stabilization of the contact (including bounces).

⁽⁶⁾ Addition of a flyback diode connected in parallel with the coil (DC version only) causes an increase in operating time when the relay drops out.

INSTANTANEOUS MONOSTABLE
INSTANTANEOUS MONOSTABLE WITH FORCIBLY GUIDED CONTACTS
TIME DELAY (ON PICK-UP OR DROP-OUT)
EXPLANATION OF SOCKET NUMBERING
FRONT CONNECTION
BACK CONNECTION
PCB MOUNT
RETAINING CLIPS
KEYING PINS



Insulation

Insulation resistance (at 500 V _{bc}) between electrically independent circuits and between these circuits and ground between open contact parts	> 1,000 MΩ > 1,000 MΩ
Withstand voltage at industrial frequency between electrically independent circuits and between these circuits and ground between open contact parts between adjacent contacts	2 kV (1 min) - 2.2 kV (1 s) 1 kV (1 min) - 1.1 kV (1 s) 2.5 kV (1 min) - 3 kV (1 s)
Impulse withstand voltage (1.2/50 μs - 0.5 J) between electrically independent circuits and between these circuits and ground between open contact parts	5 kV 3 kV



Mechanical specifications

Mechanical life expectancy		DC: 20 x 10 ⁶ AC: 10 x 10 ⁶ operations			
Maximum switching rate	Mechanical	3,600 operations / hour			
Degree of protection (with relay mounted)		IP40			
	POK-POKS	BIPOK-BIPOKS	TRIPOK-TRIPOKS	QUADRIPOKS	ESAPOKS
Dimensions (mm) ⁽¹⁾	20 x 50 x 45	40 x 50 x 45	60 x 50 x 45	80 x 61 x 45	120 x 50 x 45
Weight (g)	~ 90	~ 170	~ 250	~ 340	~ 520

⁽¹⁾ Excluding output terminals



Environmental specifications

Operating temperature	Standard OKUIC	(-13 to 131) °F (-25 to 55) °C (-13 to 158) °F (-25 to 70) °C
Storage and shipping temperature		(-58 to 185) °F (-50 to 85) °C
Relative humidity		Standard: 75 % RH, Tropicalized: 95 % RH
Resistance to vibrations		5 g - 10 to 55 Hz - 1 min
Resistance to shock		20 g - 11 ms
Fire behavior		V0



Standards and reference values

EN 61810-1, EN 61810-2, EN 61810-7	Electromechanical elementary relays
EN 60695-2-10	Fire behavior
EN 61000	Electromagnetic compatibility
EN 60529	Degree of protection provided by enclosures

Unless otherwise specified, the products are designed and manufactured according to the requirements of the above-mentioned European and International standards. In accordance with EN 61810-1, all items of technical data are referred to ambient temperature 23 °C, atmospheric pressure 96 kPa and 50 % humidity. Tolerance for coil resistance, nominal electrical input and nominal power is ± 7 %.



Railways, rolling stock - Standards

EN 60077	Electric equipment for rolling stock — general service conditions and general rules
EN 50155	Electronic equipment used on rolling stock
EN 61373	Shock and vibration tests, CAT 1, Class B
EN 45545-2	Fire behavior, CAT E10, Requirement R26, V0
ASTM E162, E662	Fire behavior

**Railways, rolling stock - Special operating ranges for POK(s) - BIPOK(s) relays ⁽¹⁾**

Nominal voltage	Minimum pick-up voltage	Maximum operating voltage	Order symbol ⁽¹⁾
24 V _{DC}	18	33	Z01
24 V _{DC}	16	32	Z02
24 V _{DC}	16.8	32	Z03
24 V _{DC}	19	30	Z04
36 V _{DC}	28	46	Z01
72 V _{DC}	55	104	Z01
72 V _{DC}	55	96	Z02
110 V _{DC}	77	144	Z01

⁽¹⁾ To order the relay with the special operating range, indicate the “Z0x” symbol in the “Keying position” field of the ordering scheme. The special range may be subject to operating specifications different from standard specifications. Please contact us for further information.

**Configuration options**

P2	Tropicalization of the coil with epoxy resin for use with 95 % RH (@ T 50 °C). This treatment also protects the coil against corrosion which could occur by combination of the humidity with certain chemical agents, such as those found in acid atmospheres (typical of geothermal power stations) or saline atmospheres.
P4GEO	Gold plating of contacts with gold-nickel alloy, thickness ≥ 6 μ. This treatment ensures long-term capacity of the contact to conduct lower currents in harsh ambient conditions such as acid atmospheres (typical of geothermal power stations) or saline atmospheres.
P5GEO	P4GEO gold-plating of contacts + P2 coil tropicalization.
P6GEO	P4GEO type gold-plating, but applied to contacts, contact terminals and output terminals + P2 coil tropicalization.
P7	AgCdO (silver cadmium oxide) contacts.
P8	Gold plating of contacts with gold-cobalt alloy, thickness ≥ 5 μ, knurled fixed contact. This finish allows further improvement of the performance provided by gold-plated contact, compared to P4GEO treatment.
LED	LED indicator showing presence of power supply, wired in parallel with the coil.
FLYBACK DIODE	Polarized component connected in parallel with the coil (type 1N4007 or BYW56 for rolling stock version) designed to suppress overvoltages generated by the coil when de-energized.
VARISTOR	Non-polarized component connected in parallel with the coil, designed to suppress overvoltages higher than the clamping voltage, generated by the coil when de-energized.
TRANSIL	Non-polarized component connected in parallel with the coil. Behavior is similar to that of a varistor, with faster operating times.
LOW TEMPERATURE	Minimum operating temperature -50 °C, only for rolling stock version (option “L”).
C.S.	PCB-mount version (for POK-POKS-BIPOK-BIPOKS only).

INSTANTANEOUS
MONOSTABLEINSTANTANEOUS
MONOSTABLE WITH
FORCIBLY GUIDED CONTACTSTIME DELAY
(ON PICK-UP
OR DROP-OUT)EXPLANATION OF
SOCKET NUMBERINGFRONT
CONNECTIONBACK
CONNECTION

PCB MOUNT

RETAINING CLIPS

KEYING PINS

Ordering scheme

Model	Number of CO contacts	Product code	Application ⁽¹⁾	Configuration A	Configuration B	Label	Type of power supply	Nominal voltage (V) ⁽²⁾	Keying position ⁽³⁾ / option
POK	2 - 5 A	POK	E: Energy Railway Fixed Equipment	1: Standard	0: Standard	F	C: V _{DC} A: V _{AC} 50 Hz H: V _{AC} 60 Hz	012 - 024 - 036 048 - 072 - 096 100 - 110 - 125 127 - 132 - 144 220 - 230	XXX CS = PCB-mount version L = low temperature**
POKS	2 - 10 A	POKS		2: Diode //	2: P2				
BIPOK	4 - 5 A	BPOK		3: Varistor	4: P4 GEO				
BIPOKS	4 - 10 A	BPOKS		4: LED	5: P5 GEO				
TRIPOK	6 - 5 A	TPOK	R: Railway Rolling Stock*	5: Diode // + LED	6: P6 GEO				
TRIPOKS	6 - 10 A	TPOKS		6: Varistor + LED	7: P7				
QUADRIPOKS	8 - 10 A	QPOK		7: Transil	8: P8				
ESAPOKS	12 - 10 A	EPOK		8: Transil + LED					

Example	TPOKS	E	3	0	F	A	230	
	TPOKSE30F-A230 - TRIPOKS relay, ENERGY series, nominal voltage 230 V _{AC} , equipped with varistor							
Example	BPOKS	R	5	8	F	C	024	
	BPOKSR58F-C024 - BIPOKS relay, ROLLING STOCK series, nominal voltage 24 V _{DC} , equipped with diode, LED, with P8 finish (gold-plated contacts)							
Example	POK	R	1	0	F	C	110	L
	POKR10F - C110 L - POK relay, rolling stock series, nominal voltage 110 V _{DC} with option "L" (low temp.)							

⁽¹⁾ **E = ENERGY:** All applications, except for railways rolling stock. Suitable on energy production, transport and distribution plants, railways fixed equipment, petrochemical and heavy industry.

R = RAILWAYS, ROLLING STOCK: Application on board rolling stock (rail-tram-trolley vehicles). Electrical specifications according to EN 60077.

Other product series available:

RAILWAYS, FIXED EQUIPMENT: Approved and conforming relays and products to RFI (FS Group) specification no. RFI DPRIM STF IFS TE 143 A. For the list of RFI approved and conforming products, consult dedicated catalog "RAILWAY SERIES – RFI APPROVED".

STATIONS: ENEL approved material meeting LV15/LV16 specifications. For the list of ENEL approved and conforming products, consult the dedicated catalog "STATIONS SERIES – LV15-LV16-LV20".


⁽²⁾ Other values on request.

⁽³⁾ Optional value. PCB-mount version available for POK - POKS - BIPOK - BIPOKS only. Multiple selection possible (e.g. CS - L). The positive mechanical keying is applied according to the manufacturer's model (not available for PCB-mount versions).


* Except ESAPOKS

** Except TRIPOKS, QUADRIPOKS and ESAPOKS



Wiring diagram

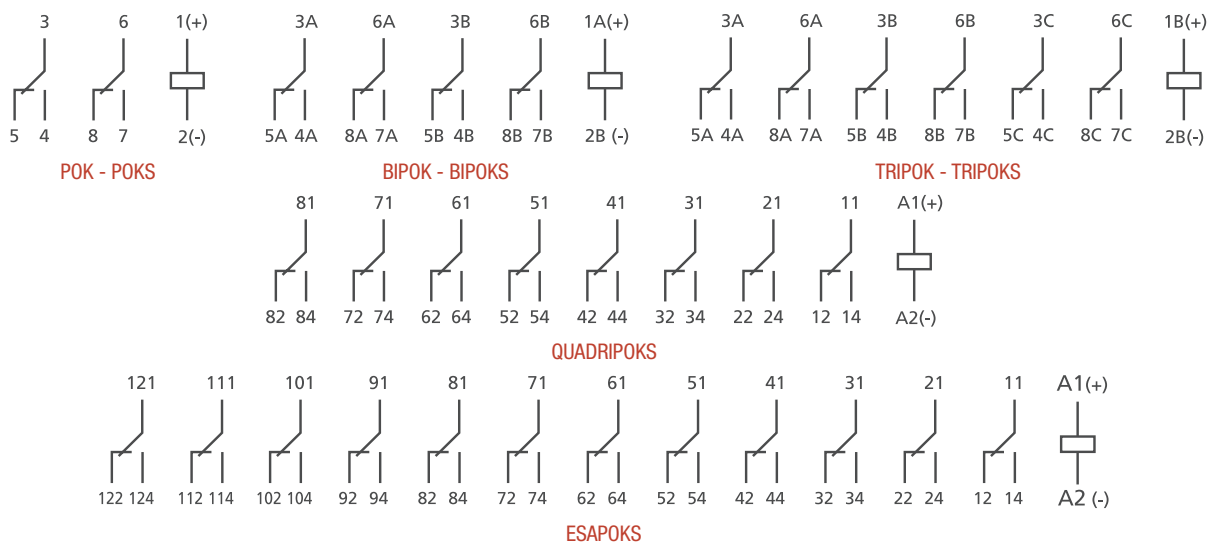

Dimensions

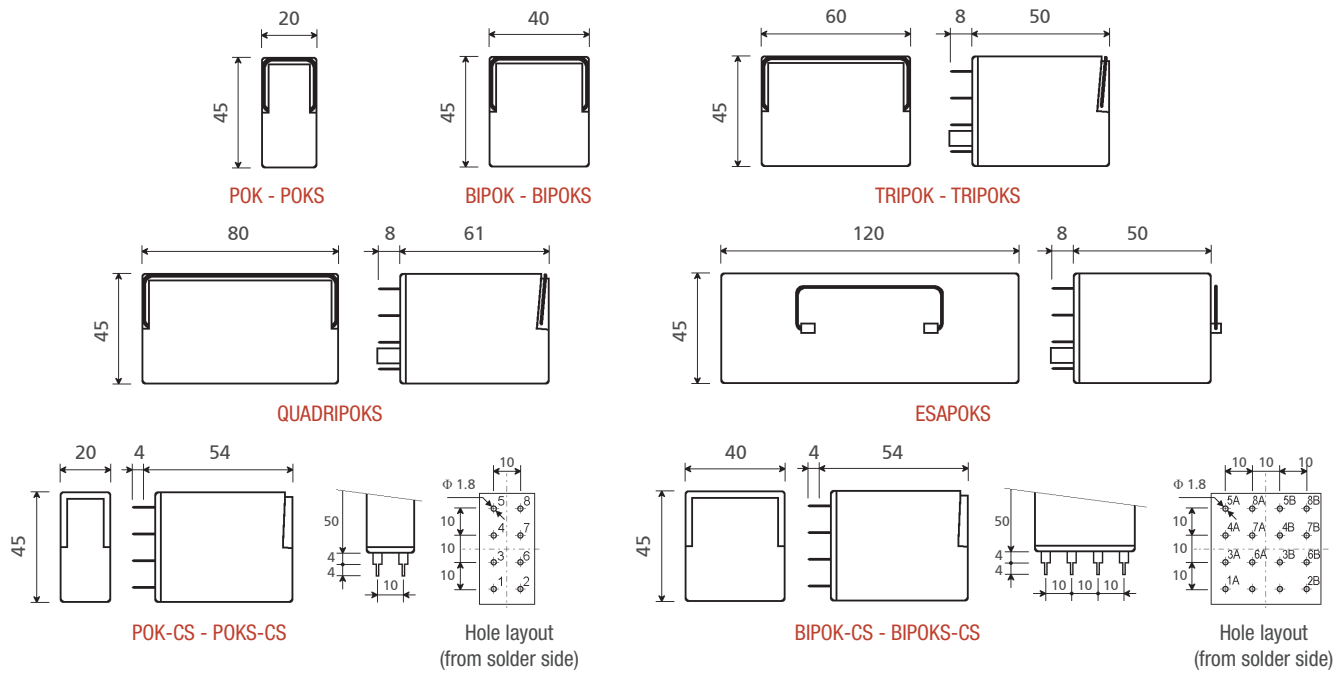

Electrical life expectancy ⁽¹⁾

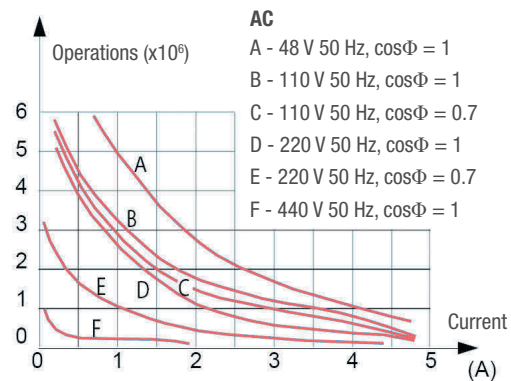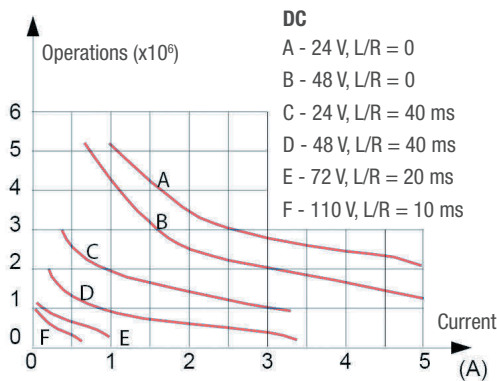

Examples of electrical life expectancy:

48 V_{DC} - 5 A - L/R = 10 ms : 5 × 10⁵ operations
 80 V_{DC} - 5 A - Resistive: 5 × 10⁵ operations
 110 V_{DC} - 0.5 A - L/R = 10 ms: 5 × 10⁵ operations

220 V_{DC} - 0.2 A - L/R = 10 ms: 10⁵ operations
 110 V_{AC} - 5 A - cosΦ = 0.7: 5 × 10⁵ operations
 220 V_{AC} - 3 A - cosΦ = 0.7: 5 × 10⁵ operations
 440 V_{AC} - 0.2 A - Resistive: 5 × 10⁵ operations

Switching frequency 1,200 operations / hour, 50 % cycle.

Sockets	POK - POKS	BIPOK - BIPOKS	TRIPOK - TRIPOKS	QUADRIPOKS	ESAPOKS
Number of terminals	8	16	24	32	48
For wall or rail mounting					
Spring clamp, wall or DIN H35 rail mounting	PAIR080	PAIR160	PAIR240	PAIR320	PAIR480
Screw, wall or DIN H35 rail mounting	50IP20-I DIN	48BIP20-I DIN	78BIP20-I DIN	96IP20-I DIN	156IP20-I DIN
Screw, wall mounting	50L	48BL	78BL	96BL	156BL
Double faston, wall mounting	51L	48L	78L	-	-
For flush mounting					
Double faston (4.8 x 0.8 mm)	ADF1	ADF2	ADF3	ADF4	ADF6
Screw	53IL	43IL	73IL	-	-
For mounting on PCB					
	65 ⁽¹⁾	65	-	-	-

⁽¹⁾ Suitable for mounting 2 relays side by side.


Retaining clips – Correspondence with sockets	POK - POKS	BIPOK - BIPOKS	TRIPOK - TRIPOKS	QUADRIPOKS	ESAPOKS
Number of clips per relay	1	1 ⁽¹⁾	2	2	2
SOCKET MODEL	CLIP MODEL				
For wall or rail mounting					
PAIR080, PAIR160, PAIR240, PAIR320, PAIR480	RPB48	RPB48	RPB48	RQ48	RPB48
50IP20-I DIN, 48BIP20-I DIN, 78BIP20-I DIN, 96IP20-I DIN, 156IP20-I DIN	RPB48	RPB48	RPB48	RQ48	RPB48
50L, 48BL, 78BL, 96BL, 156BL	RPB48	RPB48	RPB48	RQ48	RPB48
51L, 48L, 78L	RPB48	RPB48	RPB48	-	-
For flush mounting					
ADF1, ADF2, ADF3, ADF4, ADF6	RPB48	RPB48	RPB48	RQ48	RPB48
ADF, 53IL, 43IL, 73IL ⁽²⁾	RPB43	RPB43	RPB43	-	-
For mounting on PCB					
	65	RPB43	RPB43	-	-

⁽¹⁾ Assume two clips for use on rolling stock.

⁽²⁾ Insert the clip before fastening the socket on the panel.

Mounting tips

- The preferred mounting position is on the wall, with the relay positioned horizontally in the reading direction on the nameplate.
- For correct use of the relays, they should be spaced apart by at least 5 mm in the horizontal direction and 20 mm in the vertical direction. This is to allow correct upward dissipation of the heat generated by the coil. Set these distances according to the socket used. Distances can be reduced depending on the environmental application conditions and on the relay duty cycle.
- For safe and secure operation, it is advisable to use retaining clips.
- No special maintenance is required.
- Condensation can form inside the relay when powered up and the outside ambient temperature is cold; this is quite normal and does not affect the operation of the relay. The plastic materials of the relay do not possess hygroscopic properties.



RELAYS

INSTANTANEOUS MONOSTABLE RELAY 2-4-6-8-12 CONTACTS

OK SERIES

USER SECTORS



Power generation



Nuclear



Power transmission



Rolling stock



Fixed railway installations




Shipbuilding



Petroleum industry



Heavy industry

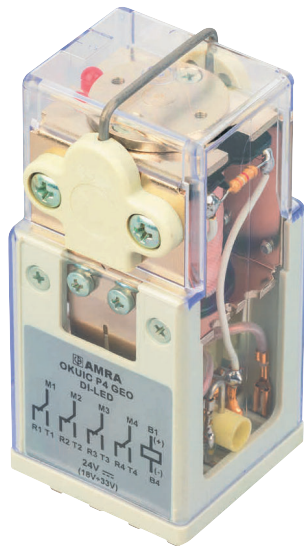

OKUIC

PRODUCT ADVANTAGES

- Plug-in monostable instantaneous relay
- Solid and rugged construction for heavy or intensive duty
- Very long electrical life expectancy and exceptional endurance
- Patent operating mechanism, designed to ensure high contact pressure
- Ample clearance between open contact elements (from 1.2 to 4 mm)
- Independent and self-cleaning contacts with high breaking capacity
- Magnetic arc blow-out for higher breaking capacity
- Excellent shock and vibration resistance
- Wide variety of configurations and customizations
- Option for use in geothermal sites available
- Wide range of sockets
- Retaining clip for secure locking of relay on socket
- Transparent cover, pull-out handle
- Positive mechanical keying for relay and socket

DESCRIPTION

The OK series is made up of seven basic models, created from **a patented common operating mechanism equipped** with four contacts. Solutions with eight or twelve contacts are obtainable by using two or three relays in combination.

The construction of the relays and careful choice of the materials are such that they ensure long life and considerable ruggedness even in harsh operating environments and when subject to strong thermal shocks. A **specific treatment (P5GEO or P6GEO)** combining coil tropicalization with gold-plated contacts allows the use of these items in geothermal electric power stations, as final relays for controlling field devices and for all power circuits.

The relays in the OK Series use a patented switching mechanism designed to minimize friction, resulting in a mechanical life expectancy of at least 100,000,000 operations.

This is made possible thanks to:

- The use of a solenoid with a core drawn in toward the main air gap, located at the center of the coil, the only position in which the available magnetic flux can be exploited to the full.
- The core motion being limited to the minimum, thereby optimizing mechanical forces and reducing friction. The motion is amplified by means of a W linkage, which allows an appreciable displacement of the contact (> 4 mm in the case of the version with NO contacts).

- The coil of elongated cylindrical geometry, best able to ensure high efficiency and effective dissipation of the heat produced.

Each contact is mounted on individual and independent blades, which are able to provide optimum shock and vibration resistance.

In particular, this generates pressure of around 0.8...1 N on the make and break contacts, which is unparalleled by other products.

The common contact slides against the fixed poles (NO and NC contacts) both when opening and when closing, which ensures a notably effective self-cleaning action.

With ample clearance between the open contact elements, it becomes possible to **guarantee an impulse withstand voltage of 5 kW** between the poles of the single contact.

Excellent electrical and mechanical performance levels allow the product to be used in the most demanding of sectors such as, for example, control and signaling functions in electricity generating stations, electrical transformer stations, rail transport or in industries with continuous production processes (chemical industry, petroleum industry, rolling mills, cement factories, etc.).

Above all, the excellent ability to withstand shock and vibration allow their use in seismic environments or on rolling stock.



Description of models

There are seven relay models in the OK Series (OK, OKS, OKFC, OKSFC, OKSCD, OKSGcCd and OKUIC). The outputs are available on 16 terminals of standard dimensions (5 x 0.8) mm, evenly and symmetrically divided into four rows spaced 10 mm apart, in both directions. Internal connections are ordered symmetrically. Turning the relay through 180° on its connector has the effect simply of changing the contacts, without affecting operation (except in the case of relays with a polarized power input).

OK – OKS

The OK relay offers ruggedness, easy installation, high breaking capacity (with magnetic arc blow-out, model OKS), safe operation and adaptability to any kind of circuit, making it suitable for all heavy duty applications in the field of remote control systems and automation. The distance between contacts is 2.2 mm. Superior shock and vibration resistance ensures that contacts are able to hold their operating position even when exposed to a shock force of 30 g - 1 ms. No opening of break contacts up to 3 g.

On the OKS model, a powerful magnetic arc blow-out located between the four change-over contacts has the effect of generating a permanent magnetic field. When an inductive load circuit is broken, the resulting arc is swiftly extended and finally extinguished through the action of the magnetic field created by the blow-out.


OKFC – OKSFC – OKUIC

The OKFC relay is an energy saving component. The distance between contacts is 1.2 mm. Contact pressures and shock and vibration resistance are the same as specified for OK/OKS models. In the case of DC loads, the breaking capacity is reduced from that of the OK relay, although the addition of the magnetic arc blow-out (model OKSFC) provides breaking capacity of up to 15 A at 120 V_{DC} (see example of electrical life expectancy). On the OKSFC model, a powerful magnetic arc blow-out located between the four change-over contacts has the effect of generating a permanent magnetic field. When an inductive load circuit is broken, the resulting arc is swiftly extended and extinguished through the action of the magnetic field created by the blow-out. With direct current, breaking capacity is doubled. For DC and AC currents that can be broken without the blow-out, the effect of having this feature available will be to reduce wear on the contacts, doubling electrical life expectancy.

The connection of two contacts in series increases electrical life expectancy and doubles breaking capacity when handling direct current.

The connection of two contacts in parallel likewise increases electrical life expectancy.

In the event that the four contacts are all available for breaking purposes, it is possible to use a series/parallel connection arrangement as illustrated below. In the case of high voltages, from 250 V upwards, it is best to avoid breaking opposite polarities on adjacent contacts.

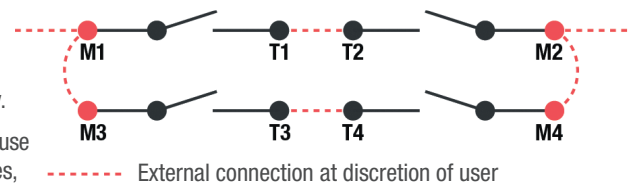

The use of the OKFC or OKSFC relay is advisable whenever the requirement is for detecting loss of voltage, hence where relays are permanently powered up, or when the ambient temperature may reach 70 °C. These relays can be powered up permanently, even at the maximum voltage of the specified operating range; they can also handle wide fluctuations in voltage and consequently are able to respond, for example, to standards for rolling stock, as in the case of the OKUIC model, which has a coil with a wide operating range.

OKSCD

The silver-coated contacts of normal relays can fuse together when closed if exposed to a peak current of 50 A for at least 5 ms. Using cadmium oxide contacts, the surfaces will fuse only at currents higher than 150 A. With magnetic arc blow-out fitted as standard to these relays, there is no possibility of the arc creating a hot spot between the contacts that could cause them to become welded together.


This relay is especially suitable for handling highly inductive direct current loads, and circuits with filament lamps where the closing of contacts can produce current peaks of up to 10 or 15 times the nominal strength (public or industrial lighting systems). It can also be used for starting small electric motors and other appliances that produce high transient currents. The OKSCD relay has an electrical life expectancy equal to that of the OKS relay, but is also suitable for use with circuits generating high transient currents, given the factors indicated above. Controlling a circuit with 600 W filament lamps connected to a 110 V_{AC} supply, for example, the OKSCD relay is capable of 1,500,000 operations.

OKSGcCd

The OKSGcCd relay has a longer electrical life expectancy than the OKSCd model. It has four normally open contacts, and a distance between contacts of > 4 mm. Magnetic arc blow-out is fitted as a standard feature. The OKSGcCd relay can be used with heavily inductive DC loads, where there is no need for change-over contacts.

OKB184

The OKB184 models are equipped as standard with a blow-out magnet and have low coil consumption. As these relays are K3-qualified, they are the relays of reference in the nuclear sector.

Models	Number of contacts	Continuous Duty	Magnetic arc blow-out	AgCdO contacts	Long travel	Rolling stock application
OK	4 ⁽¹⁾					
OKS			•			
OKFC		•				
OKSFC		•	•			
OKSCd			•	•		
OKSGcCd			•	•	•	
OKUIC		•	•			•
 OKB184			•			

⁽¹⁾ Versions with 8 and 12 contacts available (excluding OKUIC, OKSCd and OKSGcCd).

 **FOR CONFIGURATION OF PRODUCT CODE, SEE "ORDERING SCHEME" TABLE**

Coil specifications	OK - OKS	OKFC - OKSFC	OKSCd - OKSGcCd	OKUIC	OKB184
Nominal voltages U_n ⁽¹⁾	DC: 12-24-36-48-72-110-125-132-144-220 AC: 12-24-48-110-127-220-230-380			48, 125 V _{DC}	
Maximum consumption at U_n (DC/AC) ⁽²⁾	4.5 W / VA	3.5 W / VA	5 W / VA	3.5 W	3.5 W
Operating range ⁽³⁾	DC: 80...110 % U_n AC: 85...115 % U_n	DC: 80...120 % U_n AC: 85...115 % U_n	DC: 80...110 % U_n AC: 80...110 % U_n	DC: 70...125 % U_n ⁽³⁾	DC: 80...110 % U_n
Type of duty	Continuous at U_n ⁽⁴⁾	Continuous	Continuous at U_n ⁽⁴⁾	Continuous	Continuous
Drop-out voltage ⁽⁵⁾	DC: > 5 % U_n AC: > 15 % U_n				

⁽¹⁾ Other values on request.

⁽²⁾ For versions with 8 and 12 contacts, double and triple the value respectively.

⁽³⁾ For operating ranges different to that specified by EN 60077, refer to table "Special operating ranges for OKUIC relay" on page 30.

⁽⁴⁾ Continuous duty is possible at the maximum voltage of the operating range at T_{max}: 40 °C.

⁽⁵⁾ Limit value for supply voltage, expressed as % of the nominal value, beneath which the relay is certain to be de-energized.

Contact specifications	OK - OKS - OKFC - OKSFC - OKUIC - OKB184	OKSCd	OKSGcCd		
Number and type ⁽¹⁾	4 CO, form C	4 CO, form C	4 NO		
Current					
Nominal ⁽²⁾	10 A	10 A			
Maximum peak (1 min) ⁽³⁾	20 A	20 A			
Maximum pulse (10 ms) ⁽³⁾	150 A	250 A			
Example of electrical life expectancy ⁽⁴⁾ 1800 operations / hour					
	OK	0.7 A – 120 V _{DC} – L/R 0 ms: 5.5 x 10 ⁵ operations			
	OKS	1 A – 120 V _{DC} – L/R 40 ms: 5 x 10 ⁵ operations			
	OKFC	0.5 A – 110 V _{DC} – L/R 40 ms: 10 ⁵ operations			
	OKSFC - OKUIC	0.7 A – 132 V _{DC} – L/R 40 ms: 10 ⁵ operations			
	OKSCd	1 A – 120 V _{DC} – L/R 40 ms: 5 x 10 ⁵ operations			
	OKSGcCd	5 A – 110 V _{DC} – L/R 20 ms: 2 x 10 ⁵ operations			
Minimum load					
Standard contacts	500 mW (20 V, 20 mA)				
Gold-plated contacts ⁽⁵⁾	200 mW (20 V, 5 mA)				
Maximum breaking voltage	350 V _{DC} / 440 V _{AC}				
Contact material	AgCu		AgCdO		
Operating time at U_n (ms) ^{(6) (7)}	OK-OKS-OKSCd	OKFC-OKSFC	OKB184	OKSGcCd	OKUIC
	DC – AC				
Pick-up (NO contact closing)	≤ 28 - ≤ 40	≤ 38 - ≤ 40	≤ 30	≤ 30 - ≤ 45	≤ 40
Drop-out (NC contact closing)	≤ 20 - ≤ 70	≤ 18 - ≤ 80	≤ 20	-	≤ 18

See next page for ⁽¹⁾ ⁽²⁾ ⁽³⁾ ⁽⁴⁾ ⁽⁵⁾ ⁽⁶⁾ ⁽⁷⁾.

- (1) Versions with 8 and 12 CO contacts available, excluding OKUIC, OKSCd and OKSGcCd.
- (2) On all contacts simultaneously.
- (3) The maximum peak and pulse currents are those currents that can be handled, for a specified time, by the contact. They do not refer to steady or interrupted currents.
- (4) For other values, see electrical life expectancy curves.
- (5) Specifications of contacts on new relay
- Plating material: **P4GEO**: gold-nickel alloy (> 6 μ).
 - When the gold-plated contact is subject to heavy loads, it will be degraded on the surface. In this case, the specifications of the standard contact should be taken into consideration. This does not impair relay operation.
- (6) Unless specified otherwise, the operating time signifies until stabilization of the contact (including bounces).
- (7) Addition of a flyback diode connected in parallel with the coil (DC version only) causes an increase in operating time when the relay drops out.

⚡ Insulation

Insulation resistance (at 500 V _{dc}) between electrically independent circuits and between these circuits and ground between open contact parts	> 1,000 MΩ > 1,000 MΩ
Withstand voltage at industrial frequency between electrically independent circuits and between these circuits and ground between open contact parts between adjacent contacts	2 kV (1 min) - 2.2 kV (1 s) 1 kV (1 min) - 1.1 kV (1 s) 2.5 kV (1 min) - 3 kV (1 s)
Impulse withstand voltage (1.2/50 μs - 0.5 J) between electrically independent circuits and between these circuits and ground between open contact parts	5 kV 3 kV

⚙️ Mechanical specifications

Mechanical life expectancy		100 x 10 ⁶ operations				
Maximum switching rate		3,600 operations / hour				
Degree of protection (with relay mounted)		IP20 / IP40 or IP50 as an option ⁽³⁾				
Type of power supply, n°CO	V _{DC} , 4 CO	V _{AC} , 4 CO	V _{DC} , 8 CO	V _{AC} , 8 CO	V _{DC} , 12 CO	V _{AC} , 12 CO
Dimensions (mm) ⁽¹⁾⁽²⁾	45 x 97 x 45	45 x 109 x 45	91.5 x 97 x 45	91.5 x 109 x 45	138 x 97 x 45	138 x 109 x 45
Weight (g)	~ 280	~ 280	~ 590	~ 590	~ 890	~ 890

- (1) Excluding output terminals.
- (2) OKUIC relay: height of 109 mm for standard version, height of 97 mm for version with LED, DIODE, VARISTOR.
- (3) To order the relay with IP40 or IP50 protection, configure the ordering code by the “Keying position” column in “Ordering scheme”.

🌡️ Environmental specifications

Operating temperature	Standard OKUIC	(-13 to 131) °F (-25 to 55) °C (-13 to 158) °F (-25 to 70) °C
Storage and shipping temperature		(-40 to 185) °F (-40 to 85) °C
Relative humidity		Standard: 75 % RH, Tropicalized: 95 % RH
Resistance to vibrations		5 g - 10 to 60 Hz - 1 min
Resistance to shock		30 g - 11 ms
Fire behavior		V0

📄 Standards and reference values

EN 61810-1, EN 61810-2, EN 61810-7 EN 60695-2-10 EN 50082-2 EN 60529	Electromechanical elementary relays Fire behavior Electromagnetic compatibility Degree of protection provided by enclosures
---	--

Unless otherwise specified, the products are designed and manufactured according to the requirements of the above-mentioned European and International standards. In accordance with EN 61810-1, all items of technical data are referred to ambient temperature 23 °C, atmospheric pressure 96 kPa and 50 % humidity. Tolerance for coil resistance, nominal electrical input and nominal power is ± 7 %.



Railways, rolling stock - Standards

EN 60077	Electric equipment for rolling stock — general service conditions and general rules
EN 50155	Electronic equipment used on rolling stock
EN 61373	Shock and vibration tests, CAT 1, Class B
EN 45545-2	Fire behavior, CAT E10, Requirement R26, V0
ASTM E162, E662	Fire behavior



Railways, rolling stock - Special operating ranges for OKUIC relay

Nominal voltage	Minimum pick-up voltage	Maximum operating voltage
24 V _{DC}	18	33
36 V _{DC}	28	46
72 V _{DC}	55	104
110 V _{DC}	77	144
128 V _{DC}	85	160



Configuration options

P2	Tropicalization of the coil with epoxy resin for use with 95 % RH (@ T 50 °C). This treatment also protects the coil against corrosion which could occur by combination of the humidity with certain chemical agents, such as those found in acid atmospheres (typical of geothermal power stations) or saline atmospheres.
P4GEO	Gold plating of contacts with gold-nickel alloy, thickness $\geq 6 \mu$. This treatment ensures long-term capacity of the contact to conduct lower currents in harsh ambient conditions such as acid atmospheres (typical of geothermal power stations) or saline atmospheres.
P5GEO	P4GEO gold-plating of contacts + P2 coil tropicalization.
P6GEO	P4GEO type gold-plating, but applied to contacts, contact terminals and output terminals + P2 coil tropicalization.
LED	LED indicator showing presence of power supply, wired in parallel with the coil.
FLYBACK DIODE	Polarized component connected in parallel with the coil (type 1N4007 or BYW56 for rolling stock version) designed to suppress overvoltages generated by the coil when de-energized.
VARISTOR	Non-polarized component connected in parallel with the coil, designed to suppress overvoltages higher than the clamping voltage, generated by the coil when de-energized.
TRANSIL	Non-polarized component connected in parallel with the coil. Behavior is similar to that of a varistor, with faster operating times.
IP40	IP40 protection with “6” handle or closure with screws.
IP50	IP50 protection with “6” handle (only for 4 CO version).
8 CONTACTS	Version with 8 change-over contacts, obtained using 2 x 4 CO relay, coils connected in series.
12 CONTACTS	Version with 12 change-over contacts, obtained using 3 x 4 CO relay, coils connected in series.



Ordering scheme

Product code	Number of contacts	Application ⁽¹⁾	Configuration A	Configuration B	Label	Type of power supply	Nominal voltage (V) ⁽²⁾	Keying position ⁽³⁾
OK OKS OKFC OKSFC OKUIC OKSCd OKSGcCd	4: CO ⁽⁴⁾ 8: 8 CO 12: 12 CO	E: Energy Railway Fixed Equipment R: Railway Rolling Stock	1: Standard 2: Diode // 3: Varistor 4: LED 5: Diode // + LED 6: Varistor + LED 7: Transil 8: Transil + LED	0: Standard 2: P2 4: P4 GEO 5: P5 GEO 6: P6 GEO 7: P7 8: P8	F	C: V _{DC} A: V _{AC} 50 Hz H: V _{AC} 60 Hz	012 - 024 - 036 048 - 072 - 100 110 - 115 - 125 127 - 132 - 144 220 - 230 - 380	XXX A: IP50 B: IP40

Example

OKSFC	E	2	0	F	C	110	
OKSFCE20F-C110 - OKSFC relay, ENERGY series, nominal voltage 110 V _{DC} , equipped with a flyback diode							

⁽¹⁾ **E = ENERGY:** All applications, except for railways rolling stock. Suitable on energy production, transport and distribution plants, railways fixed equipment, petrochemical and heavy industry.

R = RAILWAYS, ROLLING STOCK: Application on board rolling stock (rail-tram-trolley vehicles). Electrical specifications according to EN 60077.

Other product series available:

RAILWAYS, FIXED EQUIPMENT: Approved and conforming relays and products to RFI (FS Group) specification no. RFI DPRIM STF IFS TE 143 A. For the list of RFI approved and conforming products, consult dedicated catalog "RAILWAY SERIES – RFI APPROVED".

STATIONS: ENEL approved material meeting LV15/LV16 specifications. For the list of ENEL approved and conforming products, consult the dedicated catalog "STATIONS SERIES – LV15-LV16-LV20".


⁽²⁾ Other values on request. Voltage 380 V available as V_{AC} only.

⁽³⁾ Optional value. The positive mechanical keying is applied according to the manufacturer's model.


⁽⁴⁾ For the standard version with four contacts, the field must be left empty.

Coded Products		
	OKB 184	OK SFC UIC
48 V _{DC}	Please contact us	-
72 V _{DC}	-	P01 4561 93
125 V _{DC}	Please contact us	-

Wiring diagram

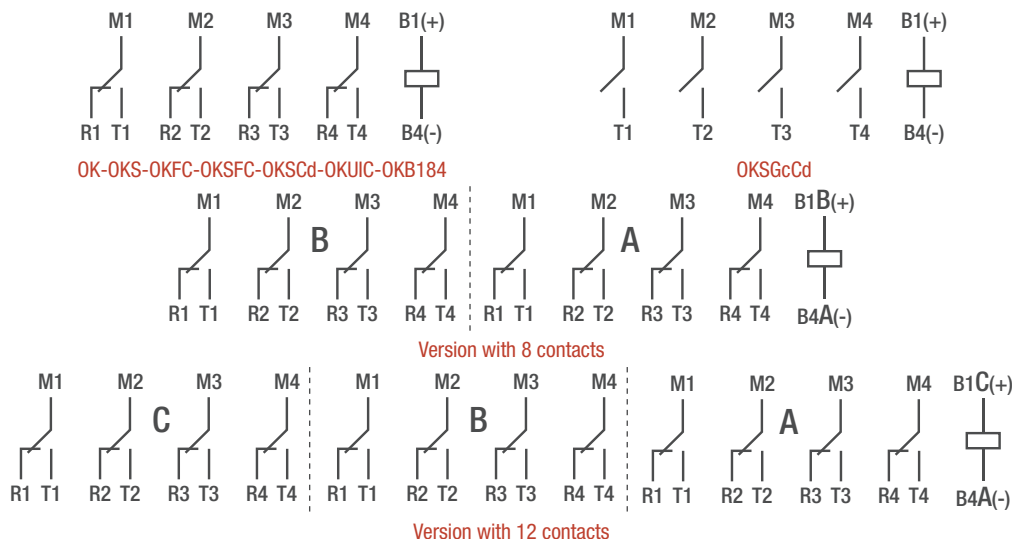

Dimensions

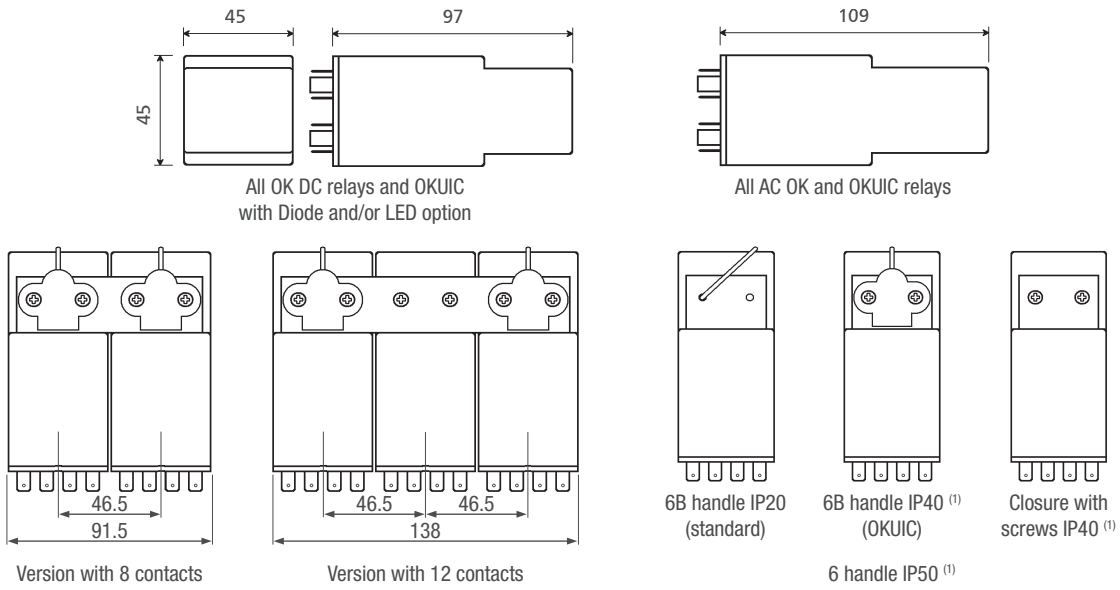









⁽¹⁾ IP40 or IP50 protection can requested as an option. See "Ordering scheme" for code details.

Examples of electrical life expectancy

	U (Contact)	I (A)	L/R (ms) cosΦ	Operations	Notes		U (Contact)	I (A)	L/R (ms) cosΦ	Operations	Notes	
OK	540 V _{AC}	3	cosΦ = 0.5	15,000	②	OKFC	220 V _{AC}	10	cosΦ = 0.7	500,000		
	380 V _{AC}	15	cosΦ = 1	10,000	②		110 V _{DC}	0.5	L/R = 5	1,000,000		
		10	cosΦ = 1	200,000			80 V _{DC}	1	L/R = 0	2,000,000		
		3 x 3.3	cosΦ = 0.8	200,000			48 V _{DC}	5	L/R = 0	1,000,000		
	220 V _{AC}	20	cosΦ = 1	20,000	②	OKSFC	120 V _{DC}	15	L/R = 0	100	②	
		15	cosΦ = 0.5	20,000				8	L/R = 0	2,000,000		
		10	cosΦ = 1	400,000	6			L/R = 10	500,000	③		
		3 x 6	cosΦ = 0.8	200,000	3			L/R = 10	100,000	②		
		5	cosΦ = 1	1,500,000	1			L/R = 10	500,000			
		5	cosΦ = 1	3,000,000	OKUIC	80 V _{DC}	25	L/R = 0	100	②		
		2.5	cosΦ = 0.25	2,000,000			15	L/R = 20	100			
		2	cosΦ = 1	15,000,000			10	L/R = 0	400,000			
		1.25	cosΦ = 1	30,000,000	7.5	L/R = 0	1,500,000	②				
		120 V _{DC}	1.5	L/R = 0	550,000	5	L/R = 10		400,000			
48 V _{DC}	10	L/R = 0	1,000,000									
	1.5	L/R = 5	18,000,000									
OKS	400 V _{DC}	6	L/R = 10	100	③	OKSCd	400 V _{DC}	6	L/R = 10	100	③	
	250 V _{DC}	15	L/R = 0	1,000	②		250 V _{DC}	15	L/R = 0	1,000	②	
		3	L/R = 20	300,000				3	L/R = 20	300,000		
		1	L/R = 10	30,000				1	L/R = 10	30,000		
		0.1	L/R = 15	3,500,000				1	L/R = 0	1,000,000		②
	120 V _{DC}	30	L/R = 0	100	③		120 V _{DC}	20	L/R = 0	10,000	②	
		20	L/R = 0	10,000				10	L/R = 10	1,000		
		10	L/R = 10	1,000	10			L/R = 0	300,000	②		
		10	L/R = 0	300,000	5			L/R = 10	60,000			
		5	L/R = 10	60,000	1			L/R = 40	500,000	②		
		2	L/R = 100	50,000	1			L/R = 10	1,000,000			
		1	L/R = 40	500,000								
		1	L/R = 10	1,000,000								
	48 V _{DC}	10	L/R = 0	2,600,000			48 V _{DC}	10	L/R = 0	2,600,000		
1.5		L/R = 5	25,000,000		3	L/R = 30		400,000				
24 V _{DC}	30	L/R = 50	200,000	④	24 V _{DC}	30	L/R = 50	200,000	④			
			25,000,000									

Notes:

- ② 2 contacts connected in series
- ③ 3 contacts connected in series
- ② 2 contacts connected in parallel
- ③ 3 contacts connected in parallel
- ④ 4 contacts connected in parallel

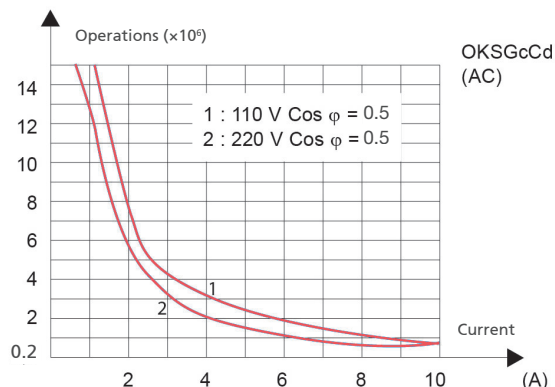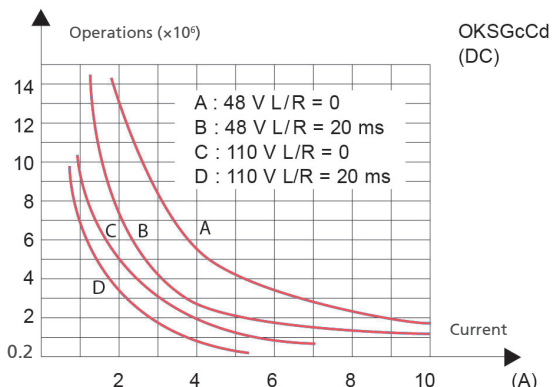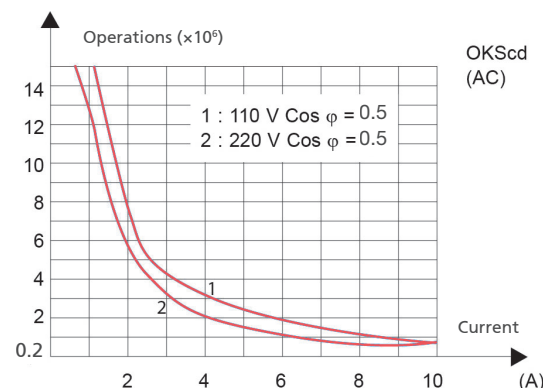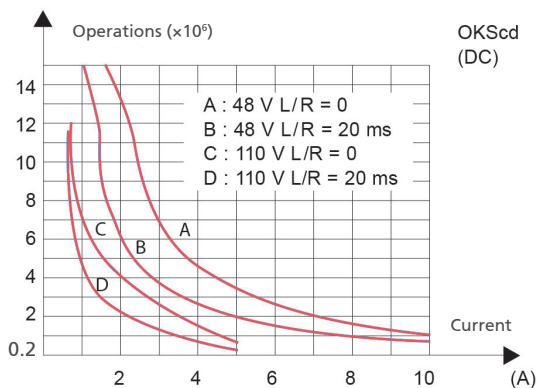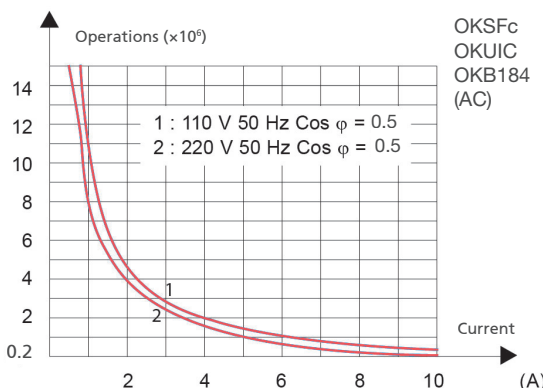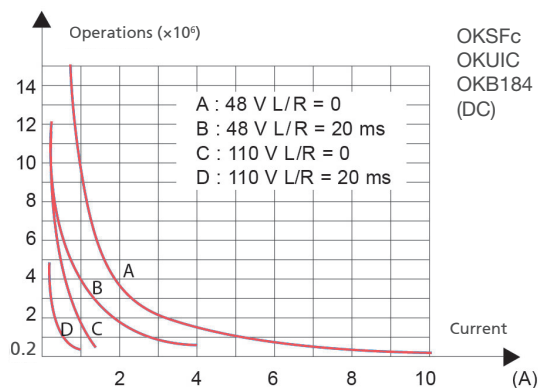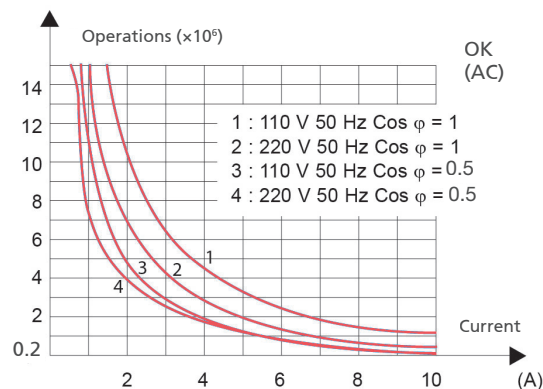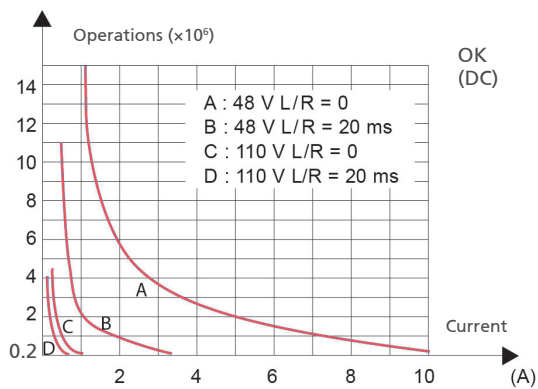

Switching frequency 1,200 operations / hour, 50 % cycle.

Sockets		OK series, 4 CO ⁽¹⁾
For wall or rail mounting		
Spring clamp, wall or DIN H35 rail mounting		PAIR160
Screw, wall or DIN H35 rail mounting		48BIP20-I DIN
Screw, wall mounting		48BL
Double faston, wall mounting		48L
For flush mounting		
Double faston (4.8 × 0.8 mm)		ADF2
Screw		43IL
For mounting on PCB		
		65


⁽¹⁾ For version with 8 and 12 contacts, assume two and three sockets respectively for each relay. In this instance, the mounting distance between centers of the sockets must be 45 mm. The ADF socket cannot be used. For more details, see specifications of mounting accessories.

Retaining clips - Correspondence with sockets	OK series - $V_{\text{supply}} = V_{\text{DC}}$	OK series - $V_{\text{supply}} = V_{\text{AC}}$ OKUIC	OKUIC with LED / VR / DIODE
Number of clips per relay	1, 2 for version with 8-12 CO contacts	1, 2 for version with 8-12 CO contacts and OKUIC	2
SOCKET MODEL	CLIP MODEL		
For wall or rail mounting			
PAIR160, 48BIP20-I DIN, 48BL, 48L	RC48	RL48	RC48
For flush mounting			
ADF2	RC48	RL48	RC48
43IL ⁽¹⁾	RC43	RL43	RC43
For mounting on PCB			
65	RC43	RL43	RC43

⁽¹⁾ Insert the clip before fastening the socket on the panel.

Mounting tips

- The preferred mounting position is on the wall, with the relay positioned horizontally in the reading direction on the nameplate.
- For correct use of the relays, they should be spaced apart by at least 5 mm in the horizontal direction and 20 mm in the vertical direction. This is to allow correct upward dissipation of the heat generated by the coil. Set these distances according to the socket used. Distances can be reduced depending on the environmental application conditions and on the relay duty cycle.
- For safe and secure operation, it is advisable to use retaining clips.
- No special maintenance is required.
- Condensation can form inside the relay when powered up and the outside ambient temperature is cold; this is quite normal and does not affect the operation of the relay. The plastic materials of the relay do not possess hygroscopic properties.



RELAYS

RAILWAY-APPROVED DOUBLE-BREAK MONOSTABLE RELAY

F-OK B SERIES

USER SECTORS



Power generation



Nuclear



Power transmission



Rolling stock



Fixed railway installations




Shipbuilding



Petroleum industry



Heavy industry

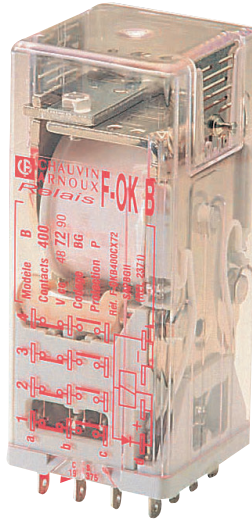

F-OK B

PRODUCT ADVANTAGES

- Four double-break changeover contacts / 13 A
- NF-F 62002 railway certification
- High reliability for intensive use in harsh conditions
- Long-travel contacts and excellent break reliability

DESCRIPTION

The relays in the **F-OK Series** are designed and manufactured with materials and solutions which make them particularly **long-lasting and rugged**. They are ideal for use in **difficult operating environments**, even in the event of significant thermal shocks. Thanks to their high resistance to **shocks and vibrations**, these relays are particularly suitable for use on rolling stock.

Because of the high electrical and mechanical performance provided by these relays, they can not only be used on rolling stock, but also in sectors such as **control and signaling** in railway transport or in applications with **continuous production processes**. Equipped with “**double break**” contacts, they are effective at **breaking DC loads**.

Models	Number of contacts	Nominal current
F-OK B	4	5 A

Coil specifications	F-OK B	F-OK B
Nominal voltages U_n ⁽¹⁾	V _{DC} : 24-36-48-72-96-110-125-550	V _{AC} : 48-127-220
Maximum consumption at U_n (DC/AC)	< 4.8 W	< 4.8 VA
Operating range ⁽¹⁾	DC : 70...125 % U_n	AC : 80...110 % U_n
Type of duty	Continuous	
Drop-out voltage ⁽²⁾	> 10 % U_n	> 10 % U_n

⁽¹⁾ Other values on request. For ESAPOKS, values > 24 V.

⁽²⁾ Limit value for supply voltage, expressed as % of the nominal value, beneath which the relay is certain to be de-energized.

Contact specifications		
Number and type	4 CO, Form Z	
Current	Nominal ⁽¹⁾	13 A
	Maximum pulse (10 ms) ⁽²⁾	300 A for 10 ms
Maximum breaking voltage	350 V _{DC}	
Contact material	AgNi AgCd010	
Contact closure pressure	> 0.3 N	
Contact opening pressure	> 0.3 N	
Contact closure time	DC	≤ 55 ms
	AC	≤ 55 ms
Contact opening time	DC	≤ 25 ms
	AC	≤ 25 ms

⁽¹⁾ On all contacts simultaneously, reduction of 30 %.

⁽²⁾ The maximum peak and pulse currents are those currents that can be handled, for a specified time, by the contact. They do not refer to steady or interrupted currents.

Insulation		
Insulation resistance (at 500 V _{DC})	between the independent circuits and the ground	> 1,000 MΩ
	between open contact parts	> 1,000 MΩ
Withstand voltage at industrial frequency	between the independent circuits and the ground	2.5 kV (1 min)
	between open contact parts	2 kV (1 min)

Mechanical specifications		
Mechanical life expectancy	100 x 10 ⁶ operations	
Degree of protection (with relay mounted)	IP40	
Dimensions (mm) ⁽¹⁾	45 x 45 x 105	
Weight (g)	300	

⁽¹⁾ Excluding output terminals

Environmental specifications		
Operating temperature	Standard	(-13 to 158) °F (-25 to 70) °C
Storage and shipping temperature		(-40 to 158) °F (-40 to 70) °C
Relative humidity	Standard: 80 %	
Fire behavior	NF-F 16-101, NF-F 16-102, NF-F 62002	



Standards and reference values

Resistance to vibrations (as per NF-F 62002)

Railway standards


2 g from 10 to 120 Hz (1 min)

NF-F 16-101, NF-F 16-102 (materials), NF-F 62002




Ordering scheme - Please contact us


Connection diagram and positive mechanical keying

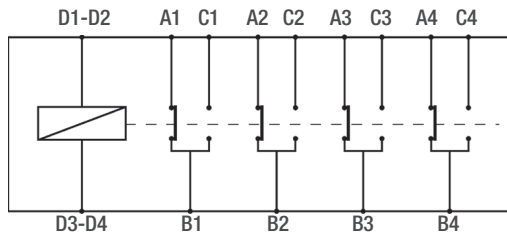



Coil voltage Keying position	Safety blank recess A	Safety blank recess B
220 V _{AC}	C	G
24 V _{DC}	A	G
36 V _{DC}	F	L
48 V _{DC}	D	G
72 V _{DC}	B	G
72 V _{DC} double winding	J	F
110 V _{DC}	F	G
125 V _{DC}	E	G
550 V _{DC}	F	G



Dimensions

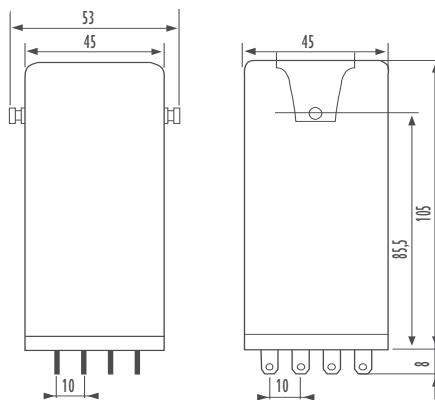

Electrical life expectancy

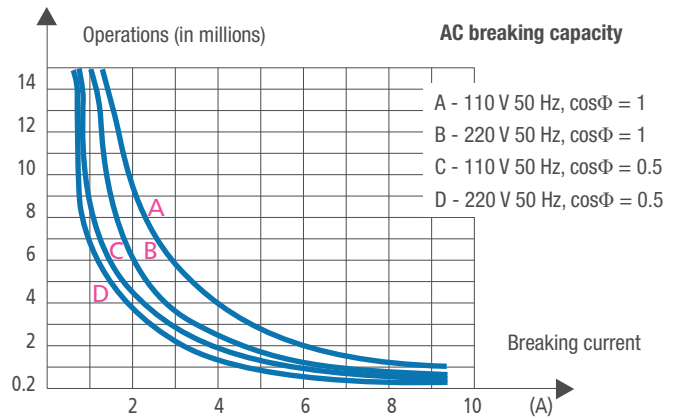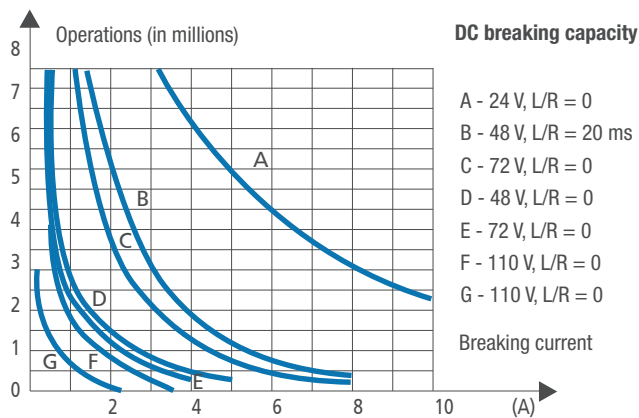

Sockets and retaining clips

F-OK B

Type of installation	Type of outputs	Model	Retaining clip
For flush mounting and DIN rail	Single faston	84F	Delivered with the socket

Mounting tips

- The preferred mounting position is on the wall, with the relay positioned horizontally in the reading direction on the nameplate.
- For correct use of the relays, they should be spaced apart by at least 5 mm in the horizontal direction and 20 mm in the vertical direction. This is to allow correct upward dissipation of the heat generated by the coil. Set these distances according to the socket used. Distances can be reduced depending on the environmental application conditions and on the relay duty cycle.
- For safe and secure operation, it is advisable to use retaining clips.
- No special maintenance is required.
- Condensation can form inside the relay when powered up and the outside ambient temperature is cold; this is quite normal and does not affect the operation of the relay. The plastic materials of the relay do not possess hygroscopic properties.