

AC Current Probe Model MD303



The Model MD303 is built for ruggedness, versatility and ease of use. It is designed with a unique hook-shaped jaw that enables the user to “pry” into or “hook” onto cables (will accept 2 x 500MCM) or even smaller bus bars.

The Models MD303 measures up to 600A. It works as a traditional current transformer (with ratios of 100:1 or

1000:1) and provides current outputs (mA) for use on DMMs, recorders or instruments with current ranges.

Model MD303 uses Hall effect technology and measure to 1000A_{dc} and 700A_{ac}. The electronics and batteries are self-contained in the handles. The output of AC probes is 1mV/A.

Features

- Unique hook-shaped jaws that enable the user to "pry" into or "hook" onto cables
- Maximum conductor size is 2 x 500MCM
- Works as a traditional current transformer with ratio of 1000:1

Applications


- Electric utility
- Field testing
- HVAC
- Industrial maintenance
- Laboratory
- Plant maintenance

Specifications

MODELS	MD303
ELECTRICAL	
Nominal Range	500A
Measurement Range	4 to 700AAC
Transformation Ratio	1000:1
Output Signal	1mAAC/AAC
Accuracy (500A Range)	
25A	4.5% of Reading
100A	3.5% of Reading
250A	3% of Reading
500A	2% of Reading
Phase Shift (500A Range)	
25A	4°
100A	2°
250A	2°
500A	2°
Overload	700A for 10 min
Frequency Range	48 to 1000Hz
Load Impedance	5Ω max noninductive
Working Voltage	600Vrms
Common Voltage	600Vrms
Output Termination	5 ft Lead
MECHANICAL	
Operating Temperature	-5° to 122°F (-15° to 50°C)
Storage Temperature	-40° to 185°F (-40° to 85°C)
Jaw Opening	1.3" (33mm)
Maximum Conductor Size	1.18" (30mm), Max Bus Bar size: 2.48 x 0.20" (63 x 5mm)
Dimensions	2.6 x 7.68 x 1.34" (66 x 195 x 34mm)
Weight	14.82 oz (420g)
Polycarbonate Material	Handles: 10% fiberglass charged polycarbonate UL94 VO
SAFETY	
Electrical	EN 61010-2-032 600V, Cat. III, Pollution: 2; 300V, Cat. IV, Pollution: 2
Electromagnetic Compatibility	EN 50081-1 Class B; EN 50082-2 Electrostatic discharge IEC 1000-4-2; Radiated field IEC 1000-4-3; Fast transients IEC 1000-4-4; Magnetic field at 50/60Hz IEC 1000-4-8
Double Insulation <input type="checkbox"/>	Yes
CE Mark	Yes

Note: Reference conditions:

23°C ± 5°K, 20 to 75% RH, external magnetic field <40A/m, no DC component, no external current carrying conductor, test sample centered, 5Ω load.

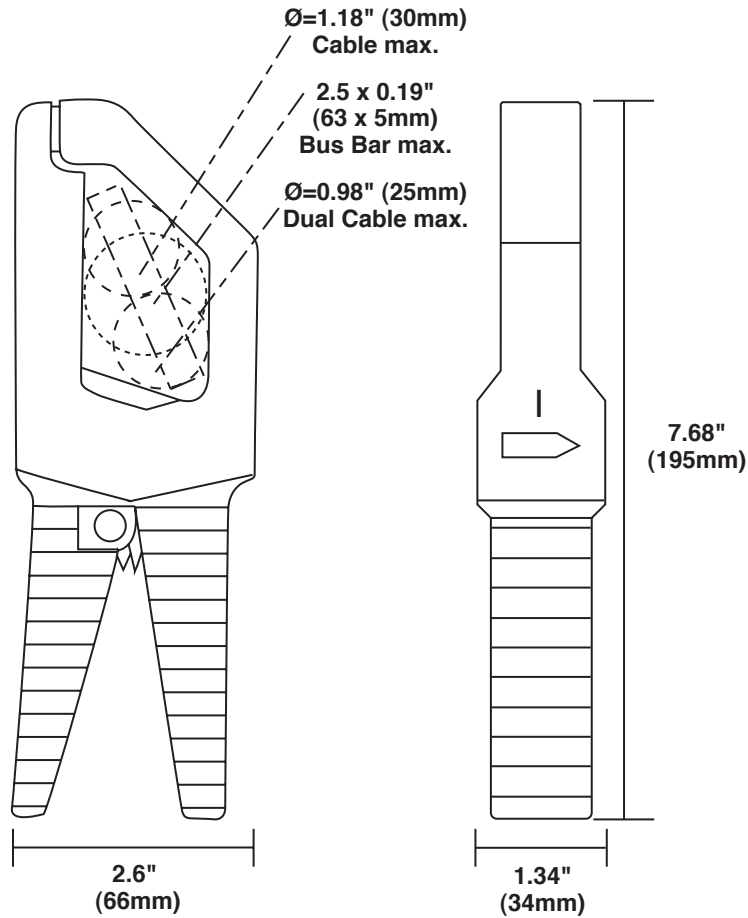

Leads:
 Double/reinforced
 5 ft (1.5m) lead
 with safety 4mm
 banana plug

ORDERING INFORMATION

CATALOG NO.

AC Current Probe Model MD303 (Lead – 1mA/A – 500A max) **Cat. #1201.21**

Includes a user manual

Accessories (Optional)

Banana plug adaptor (to nonrecessed plug) **Cat. #1017.45**

Contact Us

United States & Canada:

Chauvin Arnoux[®], Inc.
d.b.a. AEMC[®] Instruments
200 Foxborough Blvd.
Foxborough, MA 02035 USA
(508) 698-2115 • Fax (508) 698-2118
www.aemc.com

Customer Support – for placing an order, obtaining price and delivery:
customerservice@aemc.com

Sales Department – for general sales information:
sales@aemc.com

Repair and Calibration Service – for information on repair and calibration, obtaining a user manual:
repair@aemc.com

Technical and Product Application Support – for technical and application support:
techinfo@aemc.com

Webmaster – for information regarding www.aemc.com:
webmaster@aemc.com

South America, Central America, Mexico, Caribbean, Australia and New Zealand:

Chauvin Arnoux[®], Inc.
d.b.a. AEMC[®] Instruments
15 Faraday Drive
Dover, NH 03820 USA
(978) 526-7667 • Fax (978) 526-7605
export@aemc.com
www.aemc.com

All other countries:

Chauvin Arnoux SCA
190, rue Championnet
75876 Paris Cedex 18, France
33 1 44 85 45 28 • Fax 33 1 46 27 73 89
info@chauvin-arnoux.com
www.chauvin-arnoux.com